CRESTRON

product reference

featuring...

PROCISE™ ADMS™ INTERMEDIA DELIVERY CRESTRON DigitalMedia™ infiNET EX® V-Panel CRESTRON Green Light®

Institutions on every level – from local community colleges to global corporations – need to transition from analog to digital and deliver uncompressed, protected HD content for presentations and enterprise-wide distribution. Crestron provides the only reliable solutions for the digital age.

Crestron DigitalMedia™ (DM) is a complete, integrated solution that manages, controls and distributes all analog and uncompressed HD digital signals – including HDMI with HDCP, EDID and CEC data – long distance over copper or fiber. Exclusive, built-in QuickSwitch HD™ technology maintains a constant HDCP connection for fast, uninterrupted HD switching. DM also features built-in software tools for simple installation and optimal performance.

Crestron **HD-MD8X1** and **HD-MD8X2** are low cost switchers perfect for in-room installations that don't require long distance transmission. These QuickSwitch HD™ switchers are more than just HDMI switchers or extenders. They also feature the same powerful installation and diagnostic software tools as DM, and are the only HDMI switchers that accept and route analog and other digital signals.

The new **ADMS Intermedia Delivery System™** is the latest in centralized content management and display. ADMS features exclusive **WorldSearch™** technology that searches, organizes, displays and plays any content that exists on any network computer, server, hard drive, player or the Internet. ADMS outputs 1080p HD video and HD 7.1 surround sound, plus two additional zones of HD stereo audio. **PROCISE™ HD 7.3 surround sound processor and HDMI source switcher,** complemented by the PROCISE™ 7X400 amplifier, are perfect solutions for modern auditoriums, training rooms and boardrooms.

Crestron delivers complete building management solutions that monitor, manage and control all the technology – including lighting, HVAC, multimedia distribution and AV presentation systems – throughout an entire facility using RoomView™ enterprise management software.

Texas Instruments chose **Crestron RoomView®** to provide direct network connectivity and control of DLP projectors. TI DLP projectors now feature built-in **"Crestron Connected" technology** to control all projectors on the network and provide emergency messaging using RoomView Express: no control system or programming required.

Crestron also introduces the next generation of touchpanel design and functionality. The **TPMC-4SM** is powered and directly connects to the network over Ethernet, providing one-wire installation and enterprise-wide room scheduling from the touchscreen. The **TPMC-3X** wireless handheld touchpanel redefines Wi-Fi control, featuring revolutionary omni-directional communication, enabling roaming between gateways for extended multi-room control, and the new **V-Panel** HD Touchpanel Displays with external Digital Graphics Engines are ultra-slim and uniquely provide VESA mount installation in addition to desktop and flush wall mount.

There's so much more… discover why the world's premiere companies standardize on Crestron.

Contents

Featured Products:

- DigitalMedia™
- PROCISE™
- ADMS
- V-Panel
- HDMI™
- TPMC-3X
- iPhone® Apps
- Wideband Switchers
- MPC Series
- Crestron + DLP

- V-Panel Touchpanels
- Isys™ Wireless Touchpanels
- Isys i/O® WiFi Touchpanels
- Isys™ Tilt Touchpanels
- Isys™ Wall Mount Touchpanels
- Network Video Streamer
- Handhelds
- Professional HD Presentation
- ADMS Intermedia Delivery System
- DigitalMedia™
- HDMI™ Solutions
- Media Presentation Controller™ (MPC)
- Interface Cables
- Multimedia Presentation Systems (MPS)
- Wideband Switchers
- QuickMedia®
- iMedia
- Digital Video Processors
- Surround Sound & Multiroom Distribution
- Apple® Integration Solutions
- RoomView™
- Control Systems
- Power Conditioner
- Keypads
- Crestron Green Light®

CRESTRON

DigitalMedia™

The digital age has come to the commercial AV world. Are you ready? With DigitalMedia™ from Crestron, you are!

You know you need to integrate the latest digital multimedia signals into your system designs, but do you know how? Perhaps you've made the jump, adding an HDMI or DVI switcher, maybe some CAT5 signal extenders? Did it all fit together neatly and work without a glitch — or do you feel like there's got to be a better solution?

Crestron developed DigitalMedia to address the complexities of all the new digital formats, as well as manage high-definition digital video and audio with HDCP right alongside existing analog formats, in a truly comprehensive solution that's amazingly simple to implement. Whether designing a new multimedia presentation and distribution system from the ground up or extending the life of an existing analog system, DigitalMedia gives you all the tools you need to get it done quickly and easily.

DigitalMedia™

DigitalMedia Cable or CresFiber™

For facility-wide AV distribution, DigitalMedia (DM) gives you the choice of using CAT-type twisted-pair copper wire or multimode optical fiber for routing all your signals. Cable lengths up to 450 ft using DigitalMedia™ Cable (DM-CBL), or 1000 ft using CresFiber™, are possible. All signals are distributed in their native formats and resolutions without compression or scaling, so there's never any loss of picture or sound quality.

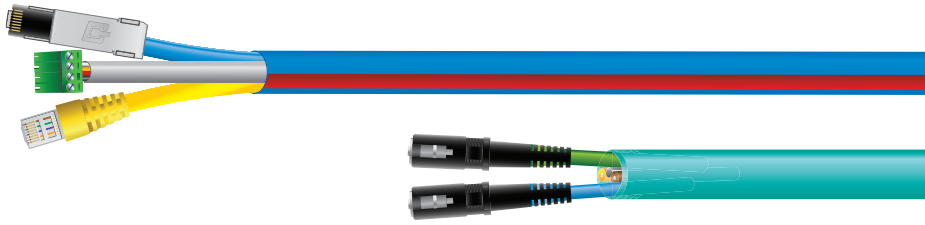

DM Transmitters and Receivers

Systems as simple as a Blu-ray Disc™ player or computer feeding a single HD display can be accomplished using just a DM transmitter and receiver. A larger system may use numerous transmitters and receivers to provide connectivity for all kinds of devices anywhere in the home.

DM-TX Series transmitters include a selection of wall plate, surface mount, portable, and rack-mountable options, with a variety of digital and analog input types, perfect for adding input connectivity in a boardroom table, lectern, wall, or equipment cabinet.

DM receivers include the DM-RX1-1G Wall Plate Receiver and the DM-RMC-100 Room Controller. The latter provides a very low profile display interface solution complete with HDMI, Ethernet, and device control. The DM-RMC-100 is available in both DM CAT and DM Fiber versions.

DM transmitters and receivers can work together in a wide variety of applications, with or without a DM switcher or control system. They work right out of the box, affording a remarkable amount of functionality, with easy setup through Crestron DM Tools software.

DM Switchers

The DM-MD8X8 and DM-MD16X16 from Crestron represent the most sophisticated matrix switchers available, delivering an incredible amount of functionality and versatility in just a few rack spaces. To handle a rack full of HDTV receivers, disc players, game consoles, media servers, computers and other sources, every input is modular, with a wide selection of input cards and cables to address virtually any digital or analog AV input type. The outputs are also modular, offering combinations of DM CAT, DM Fiber, HDMI and analog audio.

The DM-MD6X1 is ideal as the main switcher for a single room. Its combination of digital, analog, and DM inputs and outputs makes it perfect for adding digital signal routing capability to an existing analog system.

DM Tools

Every DM product boasts capabilities far beyond mere AV signal routing, providing invaluable features like HDCP key management, EDID format and resolution management, CEC device control, low latency QuickSwitch HD™ switching, USB HID mouse/keyboard routing, Ethernet networking, analog audio distribution, and extensive troubleshooting tools. You would think all this technology would be difficult to use, but it's not. In fact, the very tools that make DM work so well also make it extremely easy to install and configure, allowing a complete 16X16 system to be commissioned in as little as 15 minutes.

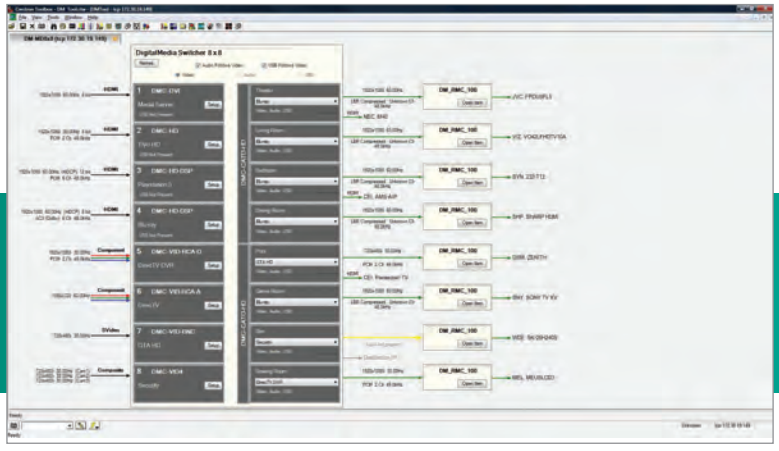

Now you're ready!

Crestron DigitalMedia is the only solution for the digital age.

High-Definition Surround Sound Processor

PROCISE™ delivers all the features you need to address the myriad design challenges of today's digital presentation systems. Without a doubt, the PSPHD PROCISE™ High-Definition Surround Sound Processor and HDMI source switcher from Crestron delivers truly awe-inspiring performance and a handsome appearance befitting the most sophisticated presentation room. One look and you'll be captivated by its marriage of modern design with…what's that? Vintage style VU meters?! That's right, the dual front panel VFDs display "mechanical" VU meters and spectrum analyzers, providing real-time signal monitoring along with a ton of other data to keep you informed throughout setup and operation.

PROCISE™

PROCISE delivers all the features you need to address the myriad design challenges of today's digital presentation systems.

PSPHD Rear Angle

PROCISE is designed to deliver the ultimate HD audio and video experiences, with features including Audyssey MultEQ XT, Dynamic EQ, and Dynamic Volume that enable calibrating a complete 7.3 speaker system to perfection. Its three independent subwoofer outputs include extensive bass management to achieve shockingly realistic low frequency effects at every seat. With XLR balanced outputs and inputs, and numerous digital inputs including HDMI™ and professional AES/EBU, PROCISE is capable of ultra low-noise performance up to 125 SNR.

Its six HDMI™ 1.3a inputs support high bit rate audio formats like Dolby® TrueHD 7.1 and DTS-HD Master Audio™ 7.1. HDMI in and out also affords high performance switching of HD video signals to drive a 1080p HDTV display or projector, or to interface with a Crestron DigitalMedia™ system. Advanced HDCP support ensures compatibility with DRM protected content and equipment.

PROCISE includes many extra features to meet the demands of a commercial boardroom or auditorium. For instance, its three balanced mix inputs, featuring independent EQ, notch filtering, gating, and compression, allow interfacing directly with mic mixers, teleconferencing codecs, and paging systems. Separate stereo and mono down-mix outputs enable full integration into larger multi-room distribution and AV presentation systems. Versatile signal steering throughout affords extensive customization for any application without the need for additional outboard signal routing equipment.

Of course, native Crestron system integration via Cresnet® and Ethernet provides unmatched control capability using any Crestron touchpanel, handheld remote, or e-Control®. Full setup and configuration is facilitated through the front panel or using PROCISE Tools software.

PROCISE™ High-Definition Surround Sound Amplifier

The PROAMP-7X400 7-channel amplifier complements the PSPHD perfectly, delivering a heart-pounding 400 Watts per channel, with XLR balanced inputs, Cresnet and Ethernet connectivity, and seamless control and monitoring through the PSPHD front panel.

See page 24 for additional details.

ADMS™

INTERMEDIA DELIVERY

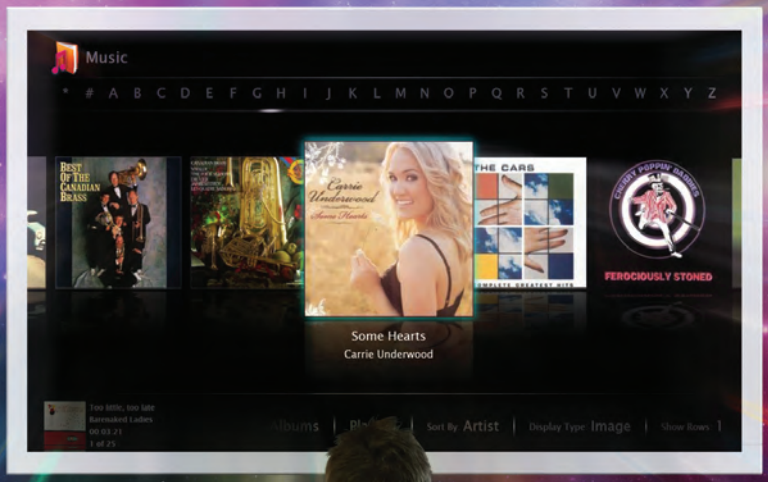

NO BOUNDARIES

Revolutionizing the way we experience media, ADMS removes the boundaries between TV, movies, music and Internet. ADMS doesn't just serve the content you have, it delivers anything you want.

ADMS

Intermedia Delivery System™

The ADMS Intermedia Delivery System™ from Crestron revolutionizes the way you experience digital media by removing the boundaries between movies, music, TV, and the Internet. The ADMS doesn't just serve the content you own, it delivers anything you want.

The ADMS provides a powerful way to gather every type of content from a full array of sources, whether it's a DVD or Blu-ray Disc™, local hard drive, network device, or online. Exclusive WorldSearch™ finds anything you want, instantly presenting every available podcast, streaming video, Internet TV program, and music file that matches your search. Onscreen or on a Crestron touchpanel, an intuitive graphical interface is your portal to immediate access.

Not just another media server.

Crestron Intermedia Delivery brings together all the most popular content sources so you don't have to search your network, computer hard drive or DVD changer, or comb through countless websites looking for that instructional video, historical film clip, or corporate message. The ADMS user interface provides concise information about available content, including metadata, with multiple ways to find the content you want — quickly and easily — and delivering it on demand right to your HD display in full 1080p resolution and 7.1 surround sound.

Through your HDTV display or touchpanel, ADMS lets you directly purchase or rent content to enhance your media library, or visit your favorite websites using the integrated Web browser. Use the built-in Blu-ray Disc drive to play DVDs and import CDs. Transfer corporate videos, photos, and music files through the front panel USB, 1394, and MMC ports. Even access complete room control right on screen.

With its user-friendly on-screen interface, native Crestron control integration, ultra secure and reliable operating system, RAID 1 data loss prevention, quiet operation, and remote dealer support access, the ADMS is clearly a superior alternative to traditional media servers.

Exclusive WorldSearch™ technology performs lightning fast intermedia searches, instantly displaying the results in a graphical onscreen menu.

Mass Movie Storage
ADC-200BR

In addition to your online downloads, adding the ADC-200BR 200-Disc Blu-ray Changer to the ADMS seamlessly integrates an entire collection of DVDs and high-definition Blu-ray Discs into the media library. Up to five changers can be daisy-chained, providing ready access to an incredible 1000 discs. Because the discs are not "ripped" to the hard drive, copyrighted content can be stored and played legally.

Easy Hard Drive Expansion
CEN-NAS-4TB

Expanding storage beyond the system's internal 1TB hard drive is made easy with the CEN-NAS-4TB. It comes pre-configured for the ADMS, and features four hot-swappable 1TB hard drives with RAID 5 protection, all in a single rack space unit. It can store 1500 standard definition movie downloads, and well over 300,000 songs (compressed @ 320kbps).

Wireless Keyboard
KB-RFUSB

Navigate the ADMS and surf the Web with ease from any seat in the room with the KB-RFUSB Wireless Keyboard. It features a 360 degree mouse pad, plus extra keys for quick access to the many ADMS features.

See page 25 for additional details.

V-Panel

12" and 15" Touchpanel Displays

The V-Panel family of touchpanels delivers a whole new level of style and function in a fresh new design offering exceptional versatility and the latest in Crestron digital touchpanel technology. Sleek and beautiful, Crestron V-Panel Touchpanel Displays are right at home on a contemporary table or desktop, and are equally suited for all kinds of custom installations, thanks to integral VESA mount compatibility. Complete connectivity is provided through a single DigitalMedia™ cable connection, affording an extremely clean appearance while allowing for wiring distances up to 200 feet.

The V12 and V15 were designed with appearance and versatility in mind. Virtually all the usual electronics have been removed from the display element and relocated to a separate Digital Graphics Engine (DGE). This allows the touchpanel to be built smaller, lighter, cooler, and quieter. In fact, all models are less than two inches deep and contain no cooling fans.

Integral VESA 100 mounting holes allow the V12 and V15 to be mounted virtually anywhere using a third-party monitor stand, arm, under-cabinet mount, or wall mount. A tabletop tilt version of each model is also available, adding a very sleek looking smooth-tilt base with integrated DM cable for a clean, low profile aspect. Finally, the wall mount version achieves a nearly flush appearance, with a very thin, paintable border — less than one inch wide — surrounding the touchscreen. Multiple wall mount options are offered, with the ability to install into shallow spaces as little as two inches deep.

All V-Panel models are available in white or black, and feature built-in microphones, stereo speakers, and a USB keyboard/mouse port. The V12 has a 12" 800 x 600 touchscreen display, while the V15 boasts a 15" widescreen 1280 x 768 touchscreen display.

V-Panel is the world's first touchpanel control solution to support HDCP.

DGE
Digital Graphics Engines

Two DGE models are available, with both designed to be installed in the central equipment cabinet. This allows direct connection to the AV sources and switchers, eliminating the need to run any extra wiring to the touchpanel location. Both models feature our 24-bit Isys i/O® graphics plus embedded Web browsing and other PC applications, IP intercom, streaming audio and video, MediaMarker™ annotation, Crestron Home® CAT5 audio connectivity, and new Crestron SIP phone capability.

The DGE-1 supports single-window full-motion video from a composite or S-video source and balanced stereo audio in and out.

The DGE-2 supports dual-window high-definition video and computer display from multiple sources, and delivers the world's first touchpanel control solution to support HDCP for complete compatibility with today's digital sources! It includes (2) HDMI/HDCP inputs, (2) RGB/VGA inputs, (2) composite/S-video/component video inputs, and balanced stereo audio. It also includes HDMI, RGB, and balanced audio outputs.

HDMI™ Solutions

HDMI is the new standard for interfacing high-definition AV equipment, and is key to handling the latest HD video and audio formats. As the leader in HDMI and control system technologies, Crestron has designed its QuickSwitch HD™ switchers and HDMI over Fiber Transmitters and Receivers to provide unparalleled performance, functionality, and custom integration capability.

Just like our DigitalMedia™ (DM) products, QuickSwitch HD switchers provide capabilities for managing EDID format and resolution, HDCP keys, and CEC control signals for every device in this system. Management can be achieved via a connected laptop loaded with Crestron DM Tool software. Through Cresnet® or Ethernet integration with a control system, the data can be viewed on touchpanels as well.

New HDMI over Fiber Transmitters and Receivers deliver a straightforward, high performance solution for extending HDMI, IR, RS-232, USB HID, Ethernet, and analog audio signals simultaneously up to 1000 feet over a single multimode fiber cable. A choice of standard, armored, or super-thin transparent fiber optic cables is offered in pre-terminated lengths up to 300 feet.

HD-MD8X1 & HD-MD8X2 QuickSwitch HD™ HDMI Switchers

- High performance 8X1 and 8X2 HDMI switchers
- Low latency QuickSwitch HD™ switching technology
- Supports HDMI 1.3a with Deep Color
- Supports 7.1 channel HD lossless audio
- DVI and DisplayPort multimode compatible
- Resolutions up to 1920x1200 and 1080p60
- Detects and displays detailed signal information
- Manages HDCP for connected devices
- Manages AV signal formats automatically
- Enables device control via CEC
- Allows audio breakaway switching
- Front panel switching controls
- Native control system integration via Ethernet or Cresnet®
- Single space 19" rack-mountable

HD-MD8X1 QuickSwitch HD™ HDMI Switcher

HD-MD8X2 QuickSwitch HD™ HDMI Switcher

Only Crestron delivers a truly complete high-definition multimedia signal management solution.

HD-TX1-F & HD-RX1-F

HDMI™ over Fiber Transmitter and Receiver

- Extends uncompressed digital video, audio, and control signals 1000 feet over a single multimode fiber wire
- Supports HDMI 1.3a with Deep Color
- Supports 7.1 channel HD lossless audio
- Handles resolutions up to 1920x1200 and 1080p60
- Passes EDID, CEC, and HDCP
- Universal IR repeater up to 192kHz
- Bidirectional RS-232 extender up to 115k baud
- No programming or configuration needed
- 12VDC power packs included

HD-TX3-F & HD-RX3-F

HDMI™ over Fiber Transmitter and Receiver

- All the features of the HD-TX1/RX1-F, plus:
  - Extends analog stereo audio signals
  - Includes mini-TRS stereo audio connector
  - Extends USB HID mouse/keyboard signals
  - Extends 10/100 Ethernet LAN data

TPMC-3X

Isys i/O® 2.8" Handheld WiFi Touchpanel

Wi-Fi Performance—Redefined!

Crestron has redefined Wi-Fi wireless performance with the new TPMC-3X Handheld WiFi Touchpanel. Extra long range, omni-directional RF coverage ensures exceptional freedom of movement without line-of-sight! The choice of 802.11 a, b, and g protocols affords reliable, high-speed 2-way wireless performance in virtually any RF environment. The TPMC-3X even supports roaming among multiple access points for extended coverage. A network of one or more TPMC-3Xs can be set up in mere minutes, using a Crestron CEN-WAP-ABG Wireless Access Point.

Instant Waking™

To ensure the most transparent user experience possible, the TPMC-3X has been engineered to wake instantly at the press of a button, touch of the touchscreen, or by simply tilting the remote upright. Button presses are sent immediately, just like an IR remote, so spontaneous actions like muting the audio, pausing the video, or changing the channel can be executed on the fly with just a single button press. Instant Waking™ also allows the remote to be put to sleep within seconds of putting it down, affording incredibly long battery life.

The Ultimate Handheld Remote

The TPMC-3X offers seamless interaction with AV and environmental systems, providing true feedback of settings and metadata information for all your digital media. Its sleek, ergonomic body with large, widely-spaced buttons accommodates hands and fingers of all sizes, with electroluminescent backlighting for use in a darkened room. Custom touchpanel versatility is afforded through a brilliant 2.8" active-matrix touchscreen. Its built-in streaming video player makes it possible to monitor a camera or preview a DVD or television channel right on the touchscreen display.

TableTop Docking Station

The TPMC-3X makes an elegant statement in any room, especially when placed on its stylish docking station. When docked, the touchpanel sits at-the-ready, able to be used as a stationary tabletop controller while charging. A wall mount docking station is also available.

- 802.11a/b/g Wi-Fi wireless communications
- Exceptional coverage and range
- Instant Waking™ behavior with tilt sensor
- Stylish and ergonomic handheld design
- Sleek-looking tabletop docking station
- Elegant gloss black finish
- Optimized layout of 27 tactile pushbuttons
- White EL backlit button text
- 2.8" active matrix color touchscreen
- High display brightness and contrast
- Wide 150 degree viewing angle
- 16-bit Isys i/O® graphics
- 240 x 320 resolution
- Dynamic graphics & text capability
- Synapse™ Image Rendering Algorithm
- DNav Dynamic Menu Objects
- Wireless streaming video
- WAV file audio feedback
- Supports roaming between access points
- Long-lasting LiPo rechargeable battery

TPMC-4SM

Isys i/O® 4.3" Wall Mount Touchpanel Media Center

The TPMC-4SM is the perfect touchpanel for any new or retrofit application. The ultra-thin, affordable Power over Ethernet (PoE) touchpanel features single wire connectivity and an assortment of mounting options, enabling you to walk into any environment and install the 4SM on any surface quickly and easily using only standard Ethernet for power, control and communication. Simply connect the TPMC-4SM to the LAN and communicate with a Crestron control system to control AV distribution, lighting, shades, thermostats and more. The TPMC-4SM is ideal for flush wall mount control in meeting rooms, classrooms and corporate boardrooms, or as a bedside panel in hotel guest rooms.

Install the TPMC-4SM outside meeting rooms and communicate directly with RoomView™ software via LAN for powerful enterprise-wide room scheduling, no control system required. The TPMC-4SM allows you to schedule meetings, reserve rooms, view room availability and review meeting calendars for any room on the network, right from the 4-inch widescreen display. Directly connected occupancy sensors detect "no shows," so even if a meeting is not cancelled or rescheduled, RoomView will automatically update the network calendar to accurately reflect current room status.

Streaming audio and video, 2-way IP intercom and WAV file feedback round out this single wire, low profile, feature-rich network interface. The TPMC-4SM is available with button and no-button bezels and in black or white.

A multi-use interface that is ultra-thin, affordable, and easy to install.

- Modern, contoured appearance
- Thin profile and small footprint
- Affordable and easy to install
- 4.3" widescreen color touchscreen
- 16-bit Isys i/O® graphics
- 800 x 480 resolution
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Streaming video
- Crestron IP intercom
- WAV file audio feedback
- Built-in microphone and speaker
- Built-in proximity sensor
- 10 optional "hard key" pushbuttons
- Dual-color button backlighting & feedback
- Engravable button text
- Room occupancy sensor option
- Single-wire Ethernet connectivity
- PoE network powered
- Available in smooth black or white
- Fits in a horizontal 1-gang or Euro back box
- Available tabletop and multi-surface mount kits

iPhone® Apps

Crestron Mobile™ and Mobile Pro™

On-site or on the road, use your iPhone to monitor and control the Crestron control system at your school or business. Crestron Mobile Pro™ and Crestron Mobile™ put a Crestron touchpanel user interface right on the popular Apple® iPhone® or iPod touch®, enabling all kinds of customizable control capabilities.

Multiple locations can be controlled from this single, intuitive graphical interface, including real-time control of room temperature, shade positions and lighting levels. With Mobile Pro, you can additionally access local AV devices and digital media metadata.

Crestron iPhone apps talk directly to the control system without any third-party software or external servers. On the road, the iPhone communicates with the Crestron control system over the 3G or EDGE cellular networks. Wherever you are, both your iPhone and iPod touch can connect via Wi-Fi.

New locations are easily added by opening the "Connections" page on the iPhone, and customized buttons, graphics and dynamic text can be added by your installer. Updates or changes to the control program are automatically sent to the iPhone when the Crestron app is launched.

With a large library of built-in graphics to aid in custom designs, Crestron iPhone Apps put a virtual Crestron touchpanel in the palm of your hand for complete mobile control.

View room and system status and adjust settings in real-time. The iPhone keeps you Crestron-connected, wherever you are.

CEN-RGBHV32X32

32X32 Wideband RGB and Audio Matrix Switchers

CEN-RGBHV32X32
32X32 Wideband RGB Matrix Switcher

- High-bandwidth 32X32 matrix switcher
- Low crosstalk & incredibly flat response
- 450MHz video bandwidth (-3dB)
- Input sync detection
- Genlock sync input
- Adjustable video blanking
- Selectable input sync impedance
- Stand-alone operation & LCD front panel
- Cresnet® and Ethernet communications
- 9-space rack mount installation

CEN-RGBHV32X32A
32X32 Audio Matrix Switcher

- 32X32 stereo audio matrix switcher
- Professional balanced inputs and outputs
- Input level compensation
- Output volume and mute control
- Adjustable audio blanking
- Controllable via the CEN-RGBHV32X32V or a control system
- Cresnet or Ethernet communications
- 3-space rack mount installation

Providing flexible signal routing and control for all your high-resolution computer and video signals is dramatically simplified using the CEN-RGBHV32X32V and CEN-RGBHV32X32A matrix switchers from Crestron.

High performance switching is ensured for any combination of RGBHV, component, S-video, and composite video signals, with native Crestron control built in for easy integration with a 2-Series control system and RoomView™ centralized management. The CEN-RGBHV32X32A Audio Matrix Switcher can be used with or without the CEN-RGBHV32X32V for extensive audio signal routing capability.

MPC Series

New Models, Wall Plates and Cables

With the introduction of the MPC Media Presentation Controller™ line, Crestron pushed the limits of where a professional control system could go. This year, we're introducing two more models — the MPC-M50 and MPC-M5!

The MPC-M50 adds a fully-programmable LCD front panel, offering new capabilities for advanced control in a 3-gang wall box mountable device. The MPC-M5 delivers a 2-gang mountable 2-Series Ethernet control system with 10 programmable buttons at an incredibly affordable price point. Both are perfect for use with DigitalMedia™ and QuickMedia® devices for a total Crestron multimedia room control solution.

CBL Series Crestron® Interface Cables

- Professional quality cables from Crestron
- Crestron guaranteed end-to-end system performance
- Full line of digital and analog AV cables
- High-speed Category 2 HDMI cables
- HDMI adapter cables for DVI and DisplayPort multimode
- All cables CL3 rated for in-wall installation
- All connectors gold plated

MPC-M50 Media Presentation Controller™

- Wall mount 2-Series control system
- Programmable LCD graphic display
- Volume control and menu navigation knob
- 7 programmable buttons with LED feedback
- Customizable backlit button labels
- Built-in IR receiver and light sensor
- 2 RS-232, 2 IR, 4 input, & 6 relay control ports
- Cresnet® and 10/100 Ethernet
- Onboard e-Control® Web server
- RoomView™ and SNMP remote management
- SSL (Secure Sockets Layer) network protection
- Astronomical time clock
- Programmable via SystemBuilder™ software
- Rugged construction
- 3-gang wall-mountable
- Available in white or black
- Includes external Cresnet® power supply

MPC-M5 Media Presentation Controller™

- Wall mount 2-Series control system
- 10 programmable buttons with LED feedback
- Customizable backlit button labels
- Built-in IR receiver
- RS-232, 2 IR, 2 input, & 2 relay control ports
- 10/100 Ethernet
- PoE network powered
- Onboard e-Control® Web server
- RoomView™ and SNMP remote management
- SSL (Secure Sockets Layer) network protection
- Astronomical time clock
- Set up via SystemBuilder™ software
- Rugged construction
- 2-gang wall-mountable
- Available in white or black

MP-WP Series Media Presentation Wall Plates

- 15 models
- Connectivity for audio, video, and control
- Crestron quality and cosmetics
- 1-gang wall box mountable
- Gangable for custom wall, lectern, and rack mount applications
- Available in white or black
- Fit off-the-shelf decorative faceplates
- Models include analog video and audio, RGB computer, DVI, HDMI™, DisplayPort, QuickMedia®, DigitalMedia™ CAT, DigitalMedia™ Fiber, and Cresnet®

MPC™
Media Presentation Controller

Crestron + DLP

Crestron + DLP puts the management functionality of RoomView™ directly into your projector, without any programming or the need for a control system. Now any projector built on Texas Instruments DLP technology can be instantly connected via Ethernet to Crestron RoomView® Express software for monitoring, automating and report logging of projector status and usage. Whether used stand-alone or connected to an existing Crestron control system, Crestron + DLP brings real-time asset management to your facility.

Crestron + DLP is available on DLP-enabled projectors from manufacturers such as Dell, BenQ, 3M and many more. Installing and registering the **free** RoomView software enables enterprise-wide monitoring of up to 250 projectors, direct unit control, and status notifications such as lamp life, power state, and unit presence.

Using the onboard, Flash-based interface, Crestron + DLP also enables direct control of the projector from an in-room computer, and provides a connection to support services for technical assistance from any MAC, PC or mobile device.

Crestron + DLP includes emergency broadcast announcements via a projector's Closed Captioning system, helping to keep everyone instantly informed during critical events.

Connecting legacy and other installed projectors to the network can be accomplished by adding a low cost Crestron controller such as the compact QM-RMC. Now every AV device, in every room of the building or across a campus, can be managed and controlled by RoomView.

Crestron provides a straightforward upgrade path to RoomView Server Edition, a Web based, cross-platform solution for room monitoring, scheduling, Web cameras, and customizable attributes such as contacts, logs, reports and plug-in modules for calendars, hot lists and instant messaging.

- Available on Texas Instruments DLP-enabled projectors
- Free software control of up to 250 units
- Real-time feedback for lamp life, unit presence and status
- Control projector functions such as power and input selection
- Built-in event logging and usage reports
- Automate device scheduling for energy savings
- Emergency Broadcast capabilities via Closed Captioning
- Onboard Flash® interface for direct in-room control
- Use stand-alone or add on legacy devices with control processor
- Easy upgrade path to RoomView Server Edition

V-Panel Touchpanels

NEW!

V12
V15

V-Panel Touchpanel Displays

- Sleek, beautiful and versatile
- Delivers high-definition graphics and video
- VESA 100 compatible mounting affords endless install options
- Low profile design — less than 2 inches deep
- Choice of 12" 800x600 or 15" 1280x768 displays
- Simple, minimal wiring using DigitalMedia™ technology
- Digital Graphics Engine (DGE) mounts separately up to 200 feet away
- Built-in microphone and stereo speakers
- USB keyboard/mouse port
- Cool, quiet fanless design
- Available in white or black

NEW!

V12-TILT
V15-TILT

V-Panel Tilt Touchpanel Displays

- Tabletop tilt version of the V12 and V15
- Includes sleek, modern looking smooth-tilt base
- Affords a very clean, low profile appearance on any tabletop
- Integrated DM CAT cable for flexible placement and minimal aesthetic impact
- Available in white or black

NEW!

V12-WALL
V15-WALL

V-Panel Wall Mount Touchpanel Displays

- Wall mount version of the V12 and V15
- Achieves a very clean, nearly flush appearance
- Features a thin, paintable border just .82" wide
- Affords a mounting depth under 2 inches
- Multiple mounting options available
- Available in white or black

NEW!

DGE-1

Digital Graphics Engine

- Provides touchpanel graphics and video processing for all V-Panels
- Installs in the central equipment cabinet instead of at the V-Panel location
- Allows V-Panels to be smaller, cooler, and quieter
- Eliminates bulky, unsightly wiring at the V-Panel location
- Connects to the V-Panel via a single DigitalMedia™ cable
- V-Panel can be up to 200 feet away
- Features 24-bit Isys i/O® touchpanel graphics
- Multi-format streaming video and audio
- Single-window full-motion video
- Wired and IP intercom capability
- Crestron SIP phone capability
- Embedded PC applications for Web browsing, playing or streaming digital media, accessing and controlling external computers, and viewing Adobe® Acrobat® and MS Word, Excel®, PowerPoint® files
- Crestron MediaMarker™ interactive annotation
- Composite/S-video video input
- Balanced stereo audio input and output
- Crestron Home® CAT5 bidirectional audio port
- 10/100 high-speed Ethernet and Cresnet®
- Single space rack-mountable enclosure

NEW!

DGE-2

Digital Graphics Engine

- Provides touchpanel graphics and HD video processing for all V-Panels
- Installs in the central equipment cabinet instead of at the V-Panel location
- Allows V-Panels to be smaller, cooler, and quieter
- Eliminates bulky, unsightly wiring at the V-Panel location
- Connects to the V-Panel via a single DigitalMedia™ cable
- V-Panel can be up to 200 feet away
- Features 24-bit Isys i/O® touchpanel graphics
- Multi-format streaming video and audio
- Dual-window full-motion HD video
- Handles HDTV sources up to 1080p60 and high-res computers up to UXGA/WUXGA
- Wired and IP intercom capability
- Crestron SIP phone capability
- Embedded PC applications for Web browsing, playing or streaming digital media, accessing and controlling external computers, and viewing Adobe® Acrobat® and MS Word, Excel®, PowerPoint® files
- Crestron MediaMarker™ interactive annotation
- (2) HDMI/HDCP, (2) RGB, and (2) composite/S-video/component video inputs
- HDMI and RGB display outputs (in addition to DM)
- Balanced stereo audio input and output
- Crestron Home® (CH) CAT5 bidirectional audio port
- 10/100 high-speed Ethernet and Cresnet®
- Two space rack-mountable enclosure

Isys™ Wireless Touchpanels

TPS-6X

Isys™ 5.7" Wireless Touchpanel

- Lightweight contoured design for handheld use
- Tabletop tilt touchpanel operation
- High gloss black or white, and matte black finishes
- Stylish tabletop tilt docking station
- Optional illuminated buttons
- Engravable backlit button text
- 5.7" active matrix color touchscreen
- 16-bit Isys™ graphics
- 640 x 480 resolution
- Dynamic graphics & text capability
- Synapse™ Image Rendering Algorithm
- Full-motion video while docked
- High performance 2.4 GHz RF wireless
- Up to 200 feet RF range indoors
- 1-way IR wireless capability
- NiMH rechargeable battery pack
- Wired Ethernet and Cresnet®
- Crestron Home® CAT5 video

Isys i/O® WiFi Touchpanels

NEW!

TPMC-3X

Isys i/O® 2.8" Handheld WiFi Touchpanel

- Sleek and ergonomic handheld design
- Stylish tabletop docking station
- Elegant gloss black finish
- Instant-Waking™ behavior with tilt sensor
- Works like an IR remote — with all the benefits of 2-way RF!
- High performance 802.11a/b/g Wi-Fi wireless communications
- 50 feet omni-directional RF range indoors
- Supports roaming between multiple Wi-Fi access points
- Long-lasting LiPo rechargeable battery pack
- Widely-spaced tactile pushbuttons
- White EL backlit button text
- 2.8" active matrix color touchscreen display
- High display brightness and contrast
- Wide 150 degrees viewing angle
- 16-bit Isys i/O® graphics
- 240 x 320 resolution
- Dynamic graphics & text capability
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Wireless video from network cameras and servers
- WAV file audio feedback
- Programmable via SystemBuilder™ and Adagio® Composer software

NEW!

TPMC-3X-DSW

Wall Mount Docking Station

- Attractive storage and charging solution for the TPMC-3X
- "Coat-hook" design with magnetic catch
- 1-gang wall box mountable
- Accepts off-the-shelf decorative faceplates
- Powered by 24 Volts DC or Cresnet®
- Available in black or white

TPMC-4XG

Isys i/O® 3.5" Handheld WiFi Touchpanel

- Elegant gloss black finish
- Generous 3.5" active matrix touchscreen
- 16-bit Isys i/O® graphics
- 240 x 320 resolution
- Synapse™ Image Rendering Algorithm
- Backlit hard buttons, thumbpad, and scroll wheel
- Wireless streaming video
- 802.11b/g Wi-Fi 2-way wireless communications
- Includes stylus with onboard storage slot
- Li-Ion rechargeable battery pack
- Stylish docking station

Isys i/O® WiFi Touchpanels

TPMC-8X

Isys i/O® 8.4" WiFi Touchpanel

- Stylish and compact ergonomic design
- 2-way 802.11a/b/g Wi-Fi wireless
- 8.4" active matrix touchscreen
- 16-bit Isys i/O® graphics
- 800 x 600 resolution
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Onboard Web browsing, streaming media, conferencing, VoIP, VNC and remote desktop
- Wireless streaming video and audio
- WAV file audio feedback
- **NEW!** Crestron IP intercom
- **NEW!** Crestron SIP phone
- Built-in microphone and speakers
- Navigation pad and "hard key" buttons
- Biometric fingerprint scanner
- Li-Ion rechargeable battery pack
- Available "booster" battery pack

TPMC-8X-DS

Desktop Docking Station for TPMC-8X

- Charges the TPMC-8X internal battery
- Provides 37 degree tilt for desktop use
- 10/100 wired Ethernet connectivity
- Available USB mouse & keyboard

TPMC-8X-DSW

Wall Mount Docking Station for TPMC-8X

- Simultaneously charges the TPMC-8X internal battery and two external batteries
- Secure, flush touchpanel docking
- Affords wall mount touchpanel operation
- Released by passcode or fingerprint recognition
- 10/100 wired Ethernet connectivity
- Available USB mouse & keyboard
- Balanced audio line output

Isys™ Tilt Touchpanels

TPMC-8T

Isys i/O® 8.4" TableTop WiFi Touchpanel

- 8.4" active matrix touchscreen
- Wired 10/100 Ethernet and 802.11a/b/g Wi-Fi
- 16-bit Isys i/O® graphics
- 800 x 600 resolution
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Onboard Web browsing, streaming media, conferencing, VoIP, VNC and remote desktop
- Streaming video and audio
- WAV file audio feedback
- **NEW!** Crestron IP intercom
- **NEW!** Crestron SIP phone
- Built-in microphone and speakers
- Navigation pad and "hard key" buttons
- Biometric fingerprint scanner

NEW!

TPMC-12

Isys i/O® 12" Tilt Touchpanel Media Center

- Slimline tiltcase design
- 12" active matrix touchscreen
- 24-Bit Isys i/O® graphics
- 800 x 600 resolution
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Full-motion video
- Interactive annotation
- Onboard Web browsing, streaming media, VNC and remote desktop
- Streaming video and audio
- WAV file audio feedback
- Built-in microphone and speakers
- QuickMedia® and Crestron Home® CAT5 AV
- High-speed Ethernet and Cresnet®
- Available USB mouse & keyboard
- Available in black or white

Isys™ Tilt Touchpanels

TPS-15B/W
TPS-17B/W
Isys™ Tilt Touchpanels

- Slimline tiltcase design
- 15" and widescreen 17" touchscreens
- 24-Bit Isys™ graphics
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Full-motion video
- Interactive annotation
- Built-in microphone and speakers
- QuickMedia® and Crestron Home® CAT5 AV
- High-speed Ethernet and Cresnet®
- Available in black or white

TPS-12G-QM
TPS-15G-QM
TPS-17G-QM NEW!
Isys™ Tilt Touchpanels

- 12", 15" and widescreen 17" touchscreens
- 24-Bit Isys™ graphics
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Dual-window HDTV and RGB video
- Crestron "Touch-the-PC" capability
- Interactive annotation
- Built-in microphone and speakers
- QuickMedia® AV connectivity
- Audience presentation output
- High-speed Ethernet and Cresnet®
- Tabletop tiltcase housing

Isys™ Wall Mount Touchpanels

NEW!

TPMC-4SM
Isys i/O® 4.3" Wall Mount Touchpanel Media Center

- Modern, contoured appearance
- Thin profile and small footprint
- Affordable and easy to install
- 4.3" widescreen color touchscreen
- 16-bit Isys i/O® graphics
- 800 x 480 resolution
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Streaming video
- Crestron IP intercom
- WAV file audio feedback
- Built-in microphone and speaker
- Built-in proximity sensor
- 10 optional "hard key" pushbuttons
- Dual-color button backlighting and feedback
- Engravable button text
- Room occupancy sensor option
- Single-wire Ethernet connectivity
- PoE network powered
- Available in smooth black or white
- Fits in a horizontal 1-gang or Euro back box
- Available tabletop and multi-surface mount kits

TPS-4L
Isys™ 3.6" Wall Mount Touchpanel

- 3.6" active matrix color touchscreen
- 16-bit Isys™ graphics
- 320 x 240 resolution
- Synapse™ Image Rendering Algorithm
- 10 backlit pushbuttons
- Engravable faceplate
- WAV file audio feedback
- High-speed Ethernet and Cresnet®
- 10 designer colors

TPS-6L
Isys™ 5.7" Wall Mount Touchpanel

- 5.7" active matrix color touchscreen
- 16-bit Isys™ graphics
- 640 x 480 resolution
- Synapse™ Image Rendering Algorithm
- Full-motion video
- Built-in microphone and optional speakers
- 12 optional "hard key" pushbuttons
- Engravable backlit button text
- WAV file audio feedback
- Light sensor
- Crestron Home® CAT5 AV
- High-speed Ethernet and Cresnet®
- Available in almond, black, or white
- Wall, lectern, and rack mounting options

Isys™ Wall Mount Touchpanels

TPMC-8L

Isys i/O® 8.4" Wall Mount Touchpanel Media Center

- 8.4" active matrix touchscreen
- 16-bit Isys i/O® graphics
- 800 x 600 resolution
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Onboard Web browsing, streaming media, conferencing, VoIP, VNC and remote desktop
- Streaming video and audio
- WAV file audio feedback
- **NEW!** Crestron IP intercom
- **NEW!** Crestron SIP phone
- Built-in microphone and speakers
- Balanced audio line output
- 16 optional "hard key" pushbuttons
- Engravable backlit button text
- Biometric fingerprint scanner
- Light sensor
- High-speed Ethernet
- Available USB mouse & keyboard
- Available in almond, black, white, or stainless steel
- Wall, lectern, and rack mounting options

NEW!

TPMC-12L

Isys i/O® 12" Wall Mount Touchpanel Media Center

- 12" active matrix touchscreen
- 24-bit Isys i/O® graphics
- 800 x 600 resolution
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Full-motion video
- Interactive annotation
- Onboard Web browsing, streaming media, VNC and remote desktop
- Streaming video and audio
- WAV file audio feedback
- Built-in microphone and speakers
- QuickMedia® and Crestron Home® CAT5 AV
- High-speed Ethernet and Cresnet®
- Available USB mouse & keyboard
- Available in black or white
- Wall, lectern, and rack mounting options

TPS-15L
TPS-17L

Isys™ Wall Mount Touchpanels

- 15" and widescreen 17" touchscreens
- 24-bit Isys™ graphics
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Full-motion video
- Interactive annotation
- Built-in microphone and speakers
- QuickMedia® and Crestron Home® CAT5 AV
- High-speed Ethernet and Cresnet®
- Available in black or white
- Wall, lectern, and rack mounting options

TPS-12G-QM-L
TPS-15G-QM-L
TPS-17G-QM-L NEW!

Isys™ G-Series Wall Mount Touchpanels

- 12", 15" and widescreen 17" touchscreens
- 24-bit Isys™ graphics
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Dual-window HDTV and RGB video
- Crestron "Touch-the-PC" capability
- Interactive annotation
- Built-in microphone and speakers
- QuickMedia® AV connectivity
- Audience presentation output
- High-speed Ethernet and Cresnet®
- Available in black or white
- Wall, lectern, and rack mounting options

NEW!

CEN-NVS100
Network Video Streamer

- Enables touchpanel display of security cameras over a wired or wireless network
- Real-time Motion-JPEG compression
- 704x480/704x576 NTSC/PAL max resolution
- Supports simultaneous dual streams
- Supports privacy masks
- Triple-window motion detection sensor and alarm I/O
- RS-485 PTZ camera control
- PoE network powered
- Surface or rack rail mounting

Handhelds

MLX-2
inifiNET EX™ LCD Handheld Remote

- infiNET EX 2-way RF wireless technology
- Ergonomic handheld design
- Elegant high gloss finish
- 57 EL backlit buttons
- Backlit LCD screen w/dynamic text display
- Operates on 4 AAA alkaline batteries

MT-1000C
MiniTouch Handheld Wireless Touchpanel

- Stylish and ergonomic handheld design
- 3.8" active matrix color touchscreen
- 16-bit Isys™ graphics
- 320 x 240 resolution
- Backlit buttons and 5-way thumbpad
- WAV file audio feedback
- 1-way RF or IR wireless
- Tabletop docking station charger

WPR-48
Waterproof Handheld Remote

- Safe to use in the shower or hot tub
- Ruggedized and fully immersible
- 9 multi-function toggle pushbuttons
- Configurable for 9, 18, 27, or 48 functions
- Customizable labels with EL backlighting
- 1-way RF or IR wireless
- Tabletop docking station charger

Professional HD Presentation

NEW!

PSPHD

PROCISE™ High-Definition Surround Sound Processor

- Professional 7.3 surround sound processor and preamplifier
- Designed for high-end presentation rooms, boardrooms, and auditoriums
- Dual front panel VFDs display real-time analog VU meters or spectrum analyzers
- Setup, control, and monitoring enabled via front panel or Crestron PROCISE Tools software
- Features Audyssey MultEQ XT, Dynamic EQ, and Dynamic Volume
- Works with Crestron CCSTK Professional Surround Sound Tuning Kit
- Decodes Dolby® TrueHD 7.1 and DTS-HD Master Audio™ 7.1 HBR formats
- Includes balanced XLR and unbalanced RCA connections on all outputs
- Available graphic or parametric EQ and delay adjustment on each theater output
- Extensive bass management through three independent subwoofer outputs
- Extensive signal steering for custom applications and speaker configurations
- Separate stereo and mono down-mix outputs for recording or multi-zone
- Six HDMI™ inputs support 7.1 HD multi-channel audio and 1080p60 video
- Features QuickSwitch HD™ technology for low-latency switching
- HDMI output contains HD video plus unprocessed 7.1 or 2-channel downmix audio
- Supports HDCP to ensure compatibility with protected sources and equipment
- One AES/EBU, four optical, and six coaxial digital inputs
- One balanced XLR stereo analog input
- Eight unbalanced RCA stereo analog inputs
- One 7.1 multi-channel analog input
- Integrates perfectly with Crestron DigitalMedia™ products via HDMI in and out
- Integrates cleanly into multimedia presentation and telepresence systems
- Includes three mix inputs for connecting mic mixers, teleconferencing codecs, paging systems, and audio signal generators
- Mix inputs feature independent EQ, notch filters, gating and compression
- Native Crestron system integration via Ethernet or Cresnet®
- Extensively programmable, with numerous presets and assignable defaults for most settings
- 3U 19" rack-mountable (rack ears included)

NEW!

PROAMP-7X400

PROCISE™ High-Definition Surround Sound Amplifier

- Professional 7-channel power amplifier
- 400 Watts per channel FTC at 8 Ohms
- Stable to 4 Ohms, all channels driven
- 24k gold-plated XLR balanced input connectors
- 7-channel XLR cable kit available separately
- Designed to match the PSPHD in performance and appearance
- 5U 19" rack-mountable (rack ears included)
- Front panel signal, clip, and fault indicators for each channel
- Native Crestron system integration via Ethernet or Cresnet®
- Remote controllable power, master mute, and channel mute
- Remote monitoring of operating temperature, channel signal presence, channel clipping, channel fault, channel overcurrent, and speaker short circuit detection
- Controllable and monitored through the PSPHD

DVPHD

High-Definition Digital Video Processor

- The ultimate video processor for home theaters and sports bars
- Watch multiple video and computer sources on one high-definition screen
- The only multi-window video processor available that supports HD video with HDCP!
- Provides up to 8 fully-scalable video windows with transition effects and QuickSwitch HD™
- Modular design accepts the choice of up to 8 simultaneous inputs
- Handles HDMI™, DVI, DisplayPort multimode, and HD-SDI digital video sources
- Handles analog RGB, component, S-video, and composite video sources
- Supports HDMI™, DVI, and RGB display devices and touchscreen monitors
- Includes integrated Crestron Isys™ graphics engine and touchpanel interface
- Features Gennum VXP™ high-definition scaling and de-interlacing
- Enables real-time annotation over high-definition video and computer images
- Supports resolutions up to WUXGA 1920 x 1200 and HDTV 1080p60
- Automatic input/output configuration via sync-detection and EDID
- Advanced HDCP compliance manages DRM for 4 digital sources and 4 displays
- Features built-in test patterns for easy setup and fine-adjustment
- Allows easy setup and operation via LCD front panel, touchscreen or mouse OSD, or Web browser
- Affords native Crestron control system integration
- Includes high-speed Ethernet and Cresnet® communications

NEW!

ADMS
Intermedia Delivery System™

- Removes the boundaries between movies, music, TV, and the Internet
- Delivers all the content you want from DVDs, Blu-ray Discs, CDs, MP3s, iTunes®, Windows Media®, Netflix®, Amazon.com®, YouTube® and virtually any other online source you desire
- Organizes everything in an intuitive on-screen or touchpanel user interface
- Allows easy searching by title, actor, artist, genre, etc.
- WorldSearch™ instantly finds the content you want – whether its on a hard drive, optical disc, or the Internet – and delivers it to your home theater in full HD and 7.1 surround sound
- Purchase or rent movies and videos right on-screen
- Integrated Web browser enables access to all your favorite Web sites
- Onboard Blu-ray Disc™ drive allows playing DVDs and importing CDs
- Up to 1000 disc external Blu-ray Disc storage – adds every disc to your media library complete with cover art and metadata
- 1TB internal hard drive storage
- RAID 1 (mirrored) data loss prevention technology
- Expandable using NAS or Windows Home Server appliances
- Outputs 1080p high-definition video and 7.1 surround sound, plus 2 discrete zones of stereo audio
- Home Control screen enables on-screen control of lighting, climate, and other home automation functions
- Affords native Crestron control system integration via Ethernet
- Gigabit LAN port enables ultra high-speed downloads and glitch-free streaming
- Front panel USB, 1394, and MMC ports enable easy transfer of home movies, photos, and music files
- Advanced HDCP support ensures compatibility with protected content
- Ultra secure and reliable operating system delivers a superior alternative to HTPCs
- Ultra-quiet design allows placement in the immediate listening environment
- VNC remote access enables off-premises dealer support and upgrade
- 3-space 19" rack-mountable (rack ears included)

NEW!

ADC-200BR
200-Disc Blu-ray Changer

- Adds an entire collection of movies to the ADMS library
- Provides storage for 200 DVDs and high-definition Blu-ray Discs
- Allows 100% legal storage of copyrighted content
- ADMS automatically adds each disc to the media library
- Connects easily to the ADMS via IEEE 1394
- Daisy-chain up to 5 units to store up to 1000 discs!

NEW!

CEN-NAS-4TB
4TB Network Attached Storage

- Plug and play storage expansion for the ADMS
- Can store 1500 standard definition movie downloads
- Can store 150,000 songs in lossless format, and well over 300,000 compressed @ 320kbps
- Contains 4 high-performance Seagate® Pipeline HD™ Pro hard drives for quiet, reliable operation
- RAID 5 protection prevents any data loss if any single drive fails
- Front access drive bays allow hot swappable drive replacement
- Provides automatic email error notification
- Single space 19" rack-mountable

NEW!

KB-RFUSB
Wireless Keyboard w/Mousepad

- Navigate the ADMS on-screen interface and surf the Web from any seat in the room
- Compact RF wireless multimedia keyboard
- Keys for quick access to ADMS features
- Integrated 360 degree mouse pad
- Includes USB RF receiver dongle
- Available in white or black

NEW!

DM-MD8X8

8x8 DigitalMedia™ Switcher

- 8X8 modular DigitalMedia matrix switcher
- Uncompressed digital AV over CAT, fiber, or HDMI
- Supports a full range of input types
- Supports HDMI™ 1.3a with Deep Color
- Supports 7.1 channel HD lossless audio
- Resolutions up to 1920x1200 and 1080p60
- 450 feet cable length using DigitalMedia Cable
- 1000 feet cable length using CresFiber™
- Easy output expansion
- Detects and displays detailed signal information
- QuickSwitch HD™ low-latency switching
- Manages HDCP for every device
- Manages AV signal formats automatically
- Enables device control via CEC
- Distributes USB HID mouse/keyboard
- Audio and USB breakaway
- Audio distribution system integration
- Simultaneous stereo and multi-channel audio
- Integrated Ethernet switch
- Fast, simple setup and diagnostics
- 4-space 19" rack-mountable

NEW!

DM-MD16X16

16x16 DigitalMedia™ Switcher

- All the capabilities of the DM-MD8X8
- 16 modular inputs and outputs
- 7-space 19" rack-mountable
- Expandable for up to 96 independent outputs

NEW!

DMC

DM Switcher Intput Cards

- **DMC-HD** HDMI, DVI, or DisplayPort multimode input, HDMI pass-thru, 2-channel analog audio out, USB HID host port
- **DMC-HD-DSP** Same as DMC-HD with simultaneous 2-channel and multi-channel audio output
- **DMC-DVI** DVI and RGB input, balanced 2-channel analog audio input, HDMI pass-thru, USB HID host port
- **DMC-VID-BNC** BNC component, composite, or S-video input; balanced 2-channel analog audio input, HDMI pass-thru
- **DMC-VID-RCA-A** RCA component, composite, or S-video input; RCA 2-channel analog audio input, HDMI pass-thru
- **DMC-VID-RCA-D** RCA component, composite, or S-video input; RCA coaxial SPDIF digital audio input, HDMI pass-thru
- **DMC-VID4** Quad composite video inputs, quad processing and sequential switching, text overlay, HDMI pass-thru
- **DMC-CAT** DM CAT input, HDMI pass-thru, 2-channel analog audio out
- **DMC-CAT-DSP** Same as DMC-CAT with simultaneous 2-channel and multi-channel audio output
- **DMC-F** DM Fiber input, HDMI pass-thru, 2-channel analog audio out
- **DMC-F-DSP** Same as DMC-F with simultaneous 2-channel and multi-channel audio output

NEW!

DMCO

DM Switcher Output Cards

- Provide versatile combinations of DM Fiber, DM CAT, HDMI, and analog audio outputs
- 9 models available for DM-MD8X8
- 30 models available for DM-16X16
- Easily specified using online DigitalMedia Switcher Configuration Tool

NEW!

DM-RMC-100

DM CAT Receiver & Room Controller

- Rear panel DM CAT input
- Supports up to 450 ft cable length
- HDMI™ display output
- USB HID keyboard/mouse device port
- 10/100 Ethernet LAN port
- RS-232, IR, digital in, & relay control ports
- Optional power current sensor
- Low profile design
- 2-gang, 4" square, or UK box mountable

NEW!

DM-RMC-100-F

DM Fiber Receiver & Room Controller

- DM Fiber input
- Supports up to 1000 ft cable length
- HDMI™ display output
- USB HID keyboard/mouse device port
- 10/100 Ethernet LAN port
- RS-232, IR, digital in, & relay control ports
- Optional power current sensor
- Low profile design
- Surface mountable

NEW!

DM-RX1-1G

Wall Plate DM CAT Receiver

- Front panel HDMI™ output
- Rear panel DM CAT input
- Supports up to 450 ft cable length
- 1-gang box mountable

NEW!

DM-TX1-1G

Wall Plate DM CAT Transmitter

- Front panel HDMI™ input
- DVI & DisplayPort multimode compatible
- Rear panel DM CAT output
- Supports up to 450 ft cable length
- 1-gang box mountable

NEW!

DM-TX-100

DM CAT Transmitter 100

- HDMI™ input
- DVI & DisplayPort multimode compatible
- USB HID host port
- IR and Ethernet control ports
- DM CAT output
- Supports up to 450 ft cable length
- Single-wire connection to a DM receiver or switcher
- Detects and reports detailed signal information
- Manages AV signal formats automatically
- Enables device control via CEC
- Easy setup and diagnostics
- Compact surface-mount design

DigitalMedia™

NEW!

DM-TX-100-F

DM Fiber Transmitter 100

- HDMI™ input
- DVI & DisplayPort multimode compatible
- USB HID host port
- IR and Ethernet control ports
- DM Fiber output
- Supports up to 1000 ft cable length
- Enables device control via CEC
- Easy setup and diagnostics
- Compact surface-mount design

NEW!

DM-TX-200

DM CAT Transmitter 200

- HDMI™ and RGB/component inputs
- DVI & DisplayPort multimode compatible
- Mini-TRS stereo audio input
- USB HID keyboard/mouse device port
- DM CAT output
- Supports up to 450 ft cable length
- Single-wire connection to a DM receiver or switcher
- Detects and reports detailed signal information
- Manages AV signal formats automatically
- Enables device control via CEC
- Easy setup and diagnostics
- Extends the life of an analog-based AV system
- Compact surface-mount design
- Fits in a Wiremold® 6000 Series Raceway

NEW!

DM-TX-300

DM CAT Transmitter 300

- HDMI™, DVI-I, and multi-format analog video inputs
- DisplayPort multimode compatible
- Balanced and unbalanced analog audio inputs
- SPDIF coaxial digital audio input
- USB HID keyboard/mouse device port
- IR, RS-232, and Ethernet control ports
- HDMI and DM CAT outputs
- Supports up to 450 ft cable length
- Single-wire connection to a DM receiver or switcher
- Detects and reports detailed signal information
- Manages AV signal formats automatically
- Enables device control via CEC
- Easy setup and diagnostics
- Extends the life of an analog-based AV system
- 1-space 19" rack-mountable

NEW!

DM-MD6X1

DigitalMedia™ Switcher

- Front panel switching controls
- HDMI™, RGB, and BNC multi-format analog video inputs
- DVI & DisplayPort multimode compatible
- Balanced analog audio inputs and output
- SPDIF coaxial digital audio input
- 3 DM CAT inputs
- USB HID host port
- Ethernet LAN port
- HDMI and DM CAT outputs
- Detects and reports detailed signal information
- Manages AV signal formats automatically
- Enables device control via CEC
- Easy setup and diagnostics
- Extends the life of an analog-based AV system
- 2-space 19" rack-mountable
- Built-in power supply

NEW!

DMCI

DigitalMedia™ Card Interface

- Allows use of a single DMC Input Card for a variety of interface functions
- Enables analog AV to HDMI™ conversion
- Enables merging DVI with analog audio to HDMI
- Allows extracting analog audio from HDMI
- Allows down-mixing multi-channel HDMI audio to stereo
- Allows extracting EDID from digital sources
- Allows generating EDID for analog sources
- Affords a Cresnet-to-CEC control gateway
- Enables USB HID mouse/keyboard extension over Ethernet
- Affords a rack-mountable DM receiver
- Includes Cresnet® control system interface
- 1/2-space rack-mountable

NEW!

DM-DR

DigitalMedia™ CAT Repeater

- Enables up to 450 ft cable length for DM CAT signals
- Inserts inline every 75 to 200 feet
- Low profile design
- 2-gang, 4" square, or UK box mountable

NEW!

DM-CBL
DigitalMedia™ Cable

- Single-cable solution for DM CAT based systems
- High-bandwidth, low-crosstalk design
- Available plenum or non-plenum
- Easy termination using DM-CONN connectors
- Overall outer jacket with foot markers

NEW!

DM-CBL-D
DigitalMedia™ D Cable

- Provides a DM upgrade path for existing installations with CresCAT® and QuickMedia® wiring
- High-bandwidth, low-crosstalk design
- Available plenum or non-plenum
- Easy termination using DM-CONN connectors

NEW!

CRESFIBER
CresFiber™ Fiber Optic Cable, 50/125 x4

- Multimode fiber optic cable
- Simple, reliable solution for DM Fiber based systems
- High-bandwidth laser-optimized OM3 cores
- Up to 1000 ft cable lengths without repeaters
- Breakout cable construction
- Four individually jacketed fiber strands
- Reinforced outer jacket with foot markers
- Provides two spare strands for backup or expansion
- Available plenum or non-plenum
- Easy termination using CRESFIBER-CONN-SC50UM connectors

NEW!

CRESFIBER-TK
CresFiber™ Termination Kit

- Fast field termination of CresFiber™ fiber optic cable
- Includes everything needed for consistent, high quality results
- Includes instructional video

NEW!

CRESFIBER-DUAL-SC
CresFiber™ Duplex Fiber Optic Cable Assembly, 50/125, SC

- Crestron certified pre-terminated SC fiber optic cables
- Dual-strand composite construction
- For use with DigitalMedia™ systems
- Available in 1.5, 3, 6, 12, 20, 30, 60, 100, 200, and 300 feet lengths
- Lengths over 30 feet feature metal and Kevlar armored jacket

HDMI™ Solutions

NEW!

HD-MD8X1
HD-MD8X2
QuickSwitch HD™ HDMI™ Switchers

- High-performance 8x1 and 8x2 HDMI switchers
- Low-latency QuickSwitch HD™ switching technology
- Supports HDMI 1.3a with Deep Color
- Supports 7.1 channel HD lossless audio
- DVI and DisplayPort multimode compatible
- Resolutions up to 1920x1200 and 1080p60
- Detects and displays detailed signal information
- Manages HDCP for connected devices
- Manages AV signal formats automatically
- Enables device control via CEC
- Allows audio breakaway switching
- Front panel switching controls
- Native control system integration via Ethernet or Cresnet
- Single space 19" rack-mountable

NEW!

HD-DA-2-QUAD
Quad 1-to-2 HDMI™ Distribution Amplifier

- Contains (4) 1-to-2 HDMI distribution amps
- Enables audio "loop-thru" for DVPHD inputs
- Front panel input sync LEDs
- HDCP and HDMI 1.3a compliant
- Single space rack mount

HDMI™ Solutions

NEW!

HD-TX1-F
HD-RX1-F

HDMI™ over Fiber Transmitter and Receiver

- Extends uncompressed digital video, audio, and control signals 1000 feet over a single multimode fiber wire
- Supports HDMI 1.3a with Deep Color
- Supports 7.1 channel HD lossless audio
- Handles resolutions up to 1920x1200 and 1080p60
- Passes EDID, CEC, and HDCP
- Universal IR repeater up to 192kHz
- Bidirectional RS-232 extender up to 115k Baud
- No programming or configuration needed
- 12VDC power packs included

NEW!

HD-TX3-F
HD-RX3-F

HDMI™ over Fiber Transmitter and Receiver

- Extends uncompressed digital video, audio, and control signals 1000 feet over a single multimode fiber wire
- Extends analog stereo audio signals
- Supports HDMI 1.3a with Deep Color
- Supports 7.1 channel HD lossless audio
- Includes mini-TRS stereo audio connector
- Handles resolutions up to 1920x1200 and 1080p60
- Passes EDID, CEC, and HDCP
- Extends USB HID mouse/keyboard signals
- Extends 10/100 Ethernet LAN data
- Universal IR repeater up to 192kHz
- Bidirectional RS-232 extender up to 115k Baud
- No programming or configuration needed
- 12VDC power packs included

NEW!

CRESFIBER-SINGLE-SC

CresFiber™ Simplex Fiber Optic Cable Assembly, 50/125, SC

- Crestron certified pre-terminated SC fiber optic cables
- For use with Crestron HDMI™ over Fiber Transmitters and Receivers
- Available in 1.5, 3, 6, 12, 20, 30, 60, 100, 200, and 300 feet lengths
- Lengths over 30 feet feature metal and Kevlar armored jacket

NEW!

CRESFIBER-SINGLE-SC-CLEAR

CresFiber™ Transparent Simplex Fiber Optic Cable Assembly, 50/125, SC

- Thin, transparent version of CresFiber™
- Virtually invisible — less than 1mm thick
- Hides in corners or along molding — great for retrofits!
- Pre-terminated and Crestron certified
- For use with Crestron HDMI™ over Fiber Transmitters and Receivers
- Also compatible with DigitalMedia™
- Available in 1.5, 3, 6, 12, 20, 30, 60, 100, 200, and 300 feet lengths

Media Presentation Controller™

NEW!

MPC-M50

MPC Media Presentation Controller™ M50

- Wall mount 2-Series control system
- Programmable LCD graphic display
- Volume control and menu navigation knob
- 7 programmable buttons with LED feedback
- Customizable backlit button labels
- Built-in IR receiver and light sensor
- 2 RS-232, 2 IR, 4 input, & 6 relay control ports
- Cresnet® and 10/100 Ethernet
- Onboard e-Control® Web server
- RoomView™ and SNMP remote management
- SSL (Secure Sockets Layer) network protection
- Astronomical time clock
- Setup via SystemBuilder™ software
- Rugged construction
- 3-gang wall-mountable
- Available in white or black
- Includes external Cresnet® power supply

MPC-M25

MPC Media Presentation Controller™ M25

- Wall mount 2-Series control system
- 15 programmable buttons with LED feedback
- Customizable backlit button labels
- 5-way navigation pad
- Volume control knob and LED bargraph
- Built-in IR receiver and light sensor
- 2 RS-232, 2 IR, 4 input, & 6 relay control ports
- Cresnet® and 10/100 Ethernet
- Onboard e-Control® Web server
- RoomView™ and SNMP remote management
- SSL (Secure Sockets Layer) network protection
- Setup via SystemBuilder™ software
- Rugged construction
- 3-gang wall-mountable
- Available in white or black
- Includes external Cresnet® power supply

MPC-M20

MPC Media Presentation Controller™ M20

- Wall mount 2-Series control system
- 15 programmable buttons with LED feedback
- Customizable backlit button labels
- 5-way navigation pad
- Volume control knob and LED bargraph
- Built-in IR receiver and light sensor
- RS-232, IR, 4 input, & 2 relay control ports
- Cresnet® and 10/100 Ethernet
- Onboard e-Control® Web server
- RoomView™ and SNMP remote management
- SSL (Secure Sockets Layer) network protection
- Setup via SystemBuilder™ software
- Rugged construction
- 3-gang wall-mountable
- Available in white or black
- Includes external Cresnet® power supply

MPC-M10

MPC Media Presentation Controller™ M10

- Wall mount 2-Series control system
- 10 programmable buttons with LED feedback
- Customizable backlit button labels
- Volume control knob and LED bargraph
- Built-in IR receiver and light sensor
- RS-232, IR, 4 input, & 2 relay control ports
- Cresnet® and 10/100 Ethernet
- Onboard e-Control® Web server
- RoomView™ and SNMP remote management
- SSL (Secure Sockets Layer) network protection
- Setup via SystemBuilder™ software
- Rugged construction
- 3-gang wall-mountable
- Available in white or black
- Includes external Cresnet® power supply

NEW!

MPC-M5

MPC Media Presentation Controller™ M5

- Low cost wall mount 2-Series control processor
- 10 programmable buttons with LED feedback
- Customizable backlit button labels
- Built-in IR receiver
- 10/100 Ethernet
- SSL encryption
- PoE network powered
- e-Control® enabled
- SNMP support
- RS-232, IR, 2 input, & 2 relay control ports
- 2-gang wall-mountable
- Available in white or black

MP-B20

Media Presentation Button Panel B20

- Wall mount pushbutton control panel
- 15 programmable buttons with LED feedback
- Customizable backlit button labels
- 5-way navigation pad
- Volume control knob and LED bargraph
- Built-in IR receiver and light sensor
- Cresnet® and 10/100 Ethernet
- 802.3af Power-over-Ethernet compatible
- Rugged construction
- Available in white or black
- 3-gang wall-mountable

MP-B10

Media Presentation Button Panel B10

- Wall mount pushbutton control panel
- 10 programmable buttons with LED feedback
- Customizable backlit button labels
- Volume control knob and LED bargraph
- Built-in IR receiver and light sensor
- Cresnet® and 10/100 Ethernet
- 802.3af Power-over-Ethernet compatible
- Rugged construction
- Available in white or black
- 3-gang wall-mountable

Media Presentation Controller™

NEW!

TTK-MP/MPC/IPAC

TableTop Kit for MP, MPC, and IPAC

- A stylish, convenient tabletop enclosure
- Fits 3-gang sized Media Presentation Controller™ models
- Fits IPAC Integrated Professional Automation Computer
- Provides a 45 degree front angle
- Sits on any flat, level surface
- Optional fixed or swivel mounting
- Rear or bottom wire access

NEW!

MP-WP125

MP-WP150

MP-WP Series

Media Presentation Wall Plates

- Connectivity for audio, video, and control
- Crestron quality and cosmetics
- 1-gang wall box mountable

Available models:

- **MP-WP100** RCA Composite Video w/RCA Stereo Audio
- **MP-WP110** Mini-DIN S-video w/RCA Stereo Audio
- **MP-WP120** RCA Component Video w/RCA Stereo Audio
- **MP-WP125** RCA Component & Composite Video w/2x RCA Stereo Audio
- **MP-WP130** DB15HD Computer w/Mini-TRS Stereo Audio
- **MP-WP131** DB15HD Computer w/Mini-TRS Stereo Audio

- Gangable for custom wall, lectern, and rack mount applications
- Available in white or black
- Fit off-the-shelf decorative face plates

- **MP-WP140** DVI-I w/Mini-TRS Stereo Audio
- **MP-WP150** HDMI™ w/Mini-TRS Stereo Audio
- **MP-WP152** HDMI™
- **MP-WP160** DisplayPort w/Mini-TRS Stereo Audio
- **MP-WP162** DisplayPort
- **MP-WP180** Crestron QuickMedia® w/Cresnet®
- **MP-WP185** DigitalMedia™ CAT
- **MP-WP186** DigitalMedia™ Fiber
- **MP-WP190** Cresnet®

Interface Cables

NEW!

CBL Series

Crestron® Interface Cables

- Professional quality cables from Crestron
- Crestron guaranteed end-to-end system performance
- Wide selection of digital and analog AV cables
- High-speed Category 2 HDMI™ cables
- HDMI adapter cables for DVI and DisplayPort multimode
- 25k gold plated connectors
- High-flex CL3-rated jacket for in-wall installation
- RoHS compliant
- Available in several popular lengths

Available models:

- **CBL-HD** High-Speed HDMI
- **CBL-DVI** Dual-Link DVI
- **CBL-HD-DVI** HDMI-to-DVI
- **CBL-DP-HD** DisplayPort-to-HDMI
- **CBL-SPDIF** RCA Coaxial Digital Audio
- **CBL-OPTICAL** Optical Digital Audio
- **CBL-XLR XLR** Balanced Audio
- **CBL-RCA2 RCA** Stereo Audio
- **CBL-RCA3 RCA** Component Video
- **CBL-RCA RCA** Composite Video
- **CBL-VGA** High-Bandwidth VGA
- **CBL-VGA-AUD** VGA w/audio
- **CBL-MINI** Mini-TRS Stereo Audio

MPS-100

Multimedia Presentation System 100

- Multimedia system switcher
- 2-Series control system
- Out-of-the-box switching and audio control
- 2 video/HDTV inputs
- 3 RGB/computer inputs
- Built-in input signal sensing
- Mutually-exclusive composite, S-video, component, and RGB outputs
- Discrete touchpanel preview output
- QuickMedia® and CH CAT5 AV connectivity
- 5 balanced stereo audio inputs
- Built-in 40 Watt amplifier
- Stereo, 70V, and 100V models
- e-Control® Web server
- RoomView™ and SNMP support
- RS-232, IR, digital in, & relay control ports
- LCD front panel setup and control
- Keypad, touchpanel, and wireless options
- Internal power supply
- 2-space rack-mountable

MPS-200

Multimedia Presentation System 200

- Multimedia system switcher
- Audio signal processor
- 2-Series control system
- Out-of-the-box switching and audio control
- 4 video/HDTV inputs
- 4 RGB/computer inputs
- Built-in input signal sensing
- Mutually-exclusive composite, S-video, component, and RGB outputs
- Discrete touchpanel preview output
- QuickMedia® and CH CAT5 AV connectivity
- 8 balanced stereo audio inputs
- 2 gated mic inputs w/4-band EQ per channel
- Separate program, speech, and record outputs
- Graphic and parametric equalization
- 40 ms speech audio delay
- Built-in 40 Watt amplifier – stereo, 70V, or 100V
- e-Control® Web server
- RoomView™ and SNMP support
- RS-232, IR, digital in, & relay control ports
- LCD front panel setup and control
- Keypad, touchpanel, and wireless options
- Internal power supply
- 2-space rack-mountable

MPS-250

Multimedia Presentation System 250

- Multimedia system switcher
- Fully-digital audio signal processor
- 2-Series control system
- Out-of-the-box switching and audio control
- 2 video/HDTV inputs
- 3 RGB/computer inputs
- 1 QuickMedia® input w/delay skew compensation
- Built-in input signal sensing
- Discrete composite, S-video, component, and RGB outputs
- Discrete touchpanel preview output
- QuickMedia® and CH CAT5 AV connectivity
- 5 balanced stereo audio inputs
- 2 gated mic inputs with compressor & limiter
- 4-channel mic mixing w/4-band EQ per channel
- Separate program, speech, and record outputs
- Graphic and parametric equalization
- 40 ms speech audio delay
- Built-in 40 Watt amplifier – stereo, 70V, or 100V
- e-Control® Web server
- RoomView™ and SNMP support
- RS-232, IR, digital in, & relay control ports
- LCD front panel setup and control
- Keypad, touchpanel, and wireless options
- Internal power supply
- 2-space rack-mountable

MPS-300

Multimedia Presentation System 300

- Multimedia system switcher
- Fully-digital audio signal processor
- 2-Series control system
- Out-of-the-box switching and audio control
- 2 video/HDTV inputs
- 3 RGB/computer inputs
- 3 QuickMedia® inputs w/delay skew compensation
- Built-in input signal sensing
- Discrete composite, S-video, component, and RGB outputs
- Discrete touchpanel preview output
- 3 QuickMedia® and 1 Crestron Home CAT5 AV outputs
- 5 balanced stereo audio inputs
- 2 gated mic inputs with compressor & limiter
- 8-channel mic mixing w/4-band EQ per channel
- Separate program, speech, and record outputs
- Graphic and parametric equalization
- 40mS speech audio delay
- Built-in 40 Watt amplifier – stereo, 70V, or 100V
- e-Control® Web server
- RoomView™ and SNMP support
- RS-232, IR, digital in, & relay control ports
- LCD front panel setup and control
- Keypad, touchpanel, and wireless options
- Internal power supply
- 2-space rack-mountable

Wideband Switchers

NEW!

CEN-RGBHV32X32V

32x32 Wideband RGB Matrix Switcher

- High-bandwidth 32X32 matrix switcher
- Low crosstalk & incredibly flat response
- 450MHz video bandwidth (-3dB)
- Input sync detection
- Genlock sync input
- Adjustable video blanking
- Selectable input sync impedance
- Stand-alone operation & LCD front panel
- Cresnet® and Ethernet communications
- 9-space rack mount installation

NEW!

CEN-RGBHV32X32A

32x32 Audio Matrix Switcher

- 32X32 stereo audio matrix switcher
- Professional balanced inputs and outputs
- Input level compensation
- Output volume and mute control
- Adjustable audio blanking
- Controllable via the CEN-RGBHV32X32V or a control system
- Cresnet® or Ethernet communications
- 3-space rack mount installation

CEN-RGBHV8X4
CEN-RGBHV8X8
CEN-RGBHV12X4
CEN-RGBHV12X8
CEN-RGBHV16X16

Wideband RGB Matrix Switchers

- High-bandwidth matrix switchers
- 5 different sizes available
- Low crosstalk & incredibly flat response
- 450MHz video bandwidth (-3dB)
- Professional balanced stereo audio
- Audio input level compensation
- Audio output volume and mute control
- Input sync detection
- Genlock sync input
- Adjustable video and audio blanking
- Selectable input sync impedance
- Stand-alone operation & LCD front panel
- Cresnet® and Ethernet communications
- Rack mount installation

QuickMedia®

NEW!

QM-RX1-2G

QuickMedia® Receiver w/Audio

- Low profile surface mount design
- Single cable interface up to 450 feet
- Composite, S-video, component, and RGB outputs
- Balanced stereo audio line output
- Built-in 30W stereo amplifier
- Onboard digital audio mixing and equalization
- 22 ns delay skew compensation and self-peaking audio
- RS-232, IR, relay, and digital in control ports
- Optional current sensor or occupancy sensor
- QuickMedia® transport
- Cresnet® communications
- Low cost, quick and easy installation
- No cooling fan for noiseless operation
- Available in black or white finishes
- Easy setup using SystemBuilder™ software

QM-RX

QuickMedia® Receiver

- Composite, S-video and RGB display outputs
- RS-232, IR, & digital in control ports
- Optional pole-mount bracket
- Optional power current sensor

QM-RMCRX-BA

Room Media Controller and QuickMedia® Receiver

- Integrated 2-Series control system
- Composite, S-video and RGB display outputs
- Discrete stereo program and speech line outputs
- 10-band graphic + 2-band parametric EQ
- Versatile input mixing and microphone EQ
- 40ms speech audio delay
- Built-in 20W stereo amplifier
- RS-232, IR, digital in, & relay control ports
- Optional power current sensor
- Ethernet and Cresnet® communications
- Built-in e-Control® Web server
- RoomView™ and SNMP support
- Optional pole-mount bracket

QM-RMC
Room Media Controller

- Compact 2-Series control system
- 10/100 Ethernet communications
- Built-in e-Control® Web server
- RoomView™ and SNMP support
- 2 RS-232, 1 IR, & 4 digital in control ports

NEW!

QM-TX2-CC
QuickMedia® Transmitter Computer Center

- Portable or rack-mount QM interface
- Single cable signal transmission up to 450 feet
- Dual DB15HD RBG computer inputs
- Buffered RGB monitor pass-thrus
- 2 balanced stereo audio inputs
- Video input signal sensing
- 2x1 input switching with audio breakaway
- Front panel switching controls
- IR output control port
- QuickMedia® transport
- Cresnet® communications
- Low cost, quick and easy installation
- Easy setup using SystemBuilder™ software
- 1/2-space rack-mountable

NEW!

QM-TX2-MC
QuickMedia® Transmitter Media Center

- Portable or rack-mount QM interface
- Single cable signal transmission up to 450 feet
- Multi-format BNC video input
- DB15HD RBG computer input
- Buffered RGB monitor pass-thru
- 2 balanced stereo audio inputs
- Video input signal sensing
- 2x1 input switching with audio breakaway
- Front panel switching controls
- IR output control port
- QuickMedia® transport
- Cresnet® communications
- Low cost, quick and easy installation
- Easy setup using SystemBuilder™ software
- 1/2-space rack-mountable

QM-TX
QuickMedia® Transmitter

- QuickMedia® multimedia interface
- Single cable signal transmission up to 450 feet
- 1 BNC composite/S-video/component/RGB input
- Balanced stereo line input
- Video input signal sensing
- 1/2-space rack-mountable

NEW!

QM-FBCC-1
QuickMedia® Floor Box Computer Center

- Floor box mountable QM computer interface
- Fits Hubbell SystemOne floor boxes and poke-throughs
- Compatible with Hubbell Style Line® and Leviton Decora® faceplate cut-outs
- Single cable signal transmission up to 450 feet
- DB15HD RBG computer input
- Stereo audio input
- Video input signal sensing
- QuickMedia® transport
- Cresnet® communications
- Low cost, quick and easy installation
- Easy setup using SystemBuilder™ software

NEW!

QM-WCC-1
QuickMedia® Wall Plate Computer Center, Single Input

- Wall mount QM computer interface
- Single-cable signal transmission up to 450 feet
- DB15HD RBG computer input
- Stereo audio input
- Video input signal sensing
- QuickMedia® transport
- Cresnet® communications
- Low cost, quick and easy installation
- Integrates with Crestron Cameo® and Decorator keypads
- Installs alongside 3rd party LAN jacks and other devices
- Available in white or black
- Easy setup using SystemBuilder™ software

QuickMedia®

NEW!

QM-WCC-2

QuickMedia® Wall Plate Computer Center, Dual Input

- Wall mount QM computer interface
- Single cable signal transmission up to 450 feet
- Dual DB15HD RBG computer inputs
- Buffered RGB monitor pass-thrus
- 2 stereo audio inputs
- Video input signal sensing
- 2x1 input switching with audio breakaway
- Compatible with QM-WMIC Mic Input Module
- QuickMedia® transport
- Cresnet® communications
- Low cost, quick and easy installation
- Integrates with Crestron Cameo® and Decorator keypads
- Installs alongside 3rd party LAN jacks and other devices
- Available in white or black
- Easy setup using SystemBuilder™ software

NEW!

QM-WMC-VCC

QuickMedia® Wall Plate Media Center

- Wall mount QM multimedia interface
- Single cable signal transmission up to 450 feet
- RCA composite & component video inputs
- DB15HD RBG computer input
- Buffered RGB monitor pass-thru
- 3 stereo audio inputs
- Video input signal sensing
- 3x1 input switching with audio breakaway
- Compatible with QM-WMIC Mic Input Module
- QuickMedia® transport
- Cresnet® communications
- Low cost, quick and easy installation
- Integrates with Crestron Cameo® and Decorator keypads
- Available in white or black
- Easy setup using SystemBuilder™ software

QM-WMC

QuickMedia® Wall Plate Media Center

- Wall mount QM multimedia interface
- Single cable signal transmission up to 450 feet
- Composite & S-video video inputs
- DB15HD RBG computer input
- Buffered RGB monitor pass-thru
- 3 stereo audio inputs
- Video input signal sensing
- 3x1 input switching with audio breakaway
- Compatible with QM-WMIC Mic Input Module
- QuickMedia® transport
- Cresnet® communications
- Low cost, quick and easy installation
- Integrates with Crestron Cameo® and Decorator keypads
- Available in white or black
- Easy setup using SystemBuilder™ software

QM-FTCC-TPS4

3.6" QuickMedia® FlipTop Touchpanel Computer Center

- Integrated 3.6" active matrix color touchpanel
- 16-bit Isys™ graphics | 320 x 240 resolution
- 10 translucent white backlit pushbuttons
- WAV file audio feedback
- QuickMedia® computer interface
- Dual-channel gated mic/line preamp
- Easy pull-out VGA cable management
- AC power outlet and LAN cable pass-thru
- Cresnet® and Ethernet communications
- Black anodized or brushed aluminum finishes

QM-FTCC
QM-FTCC-NB

QuickMedia® FlipTop Computer Centers

- QuickMedia® computer interface
- Stylish flush-mount FlipTop housing
- Keypad with dual bargraphs (QM-FTCC)
- Dual-channel gated mic/line preamp
- AC power outlet and LAN pass-thru port
- Optional cable management kit
- Black anodized or brushed aluminum finishes

QM-FTDC
QM-FTDC-NB

QuickMedia® FlipTop Data Centers

- QuickMedia® computer interface
- Stylish flush-mount FlipTop housing
- Keypad with dual bargraphs (QM-FTDC)
- Dual-channel gated mic/line preamp
- AC power outlet
- 2 LAN and phone pass-thru ports
- Optional cable management kit
- Black anodized or brushed aluminum finishes

QM-FTMC
QM-FTMC-NB
QuickMedia® FlipTop Media Centers

- QuickMedia® multimedia interface
- Computer, video, S-video & audio inputs
- Stylish flush-mount FlipTop housing
- Keypad with dual bargraphs (QM-FTMC)
- Dual-channel gated mic/line preamp
- AC power outlet and LAN pass-thru port
- Optional cable management kit
- Black anodized or brushed aluminum finishes

QM-FTMCSC
QM-FTMCSC-NB
QuickMedia® FlipTop Media Centers w/Cable Storage Compartment

- QuickMedia® multimedia interface
- Computer, video, S-video & audio inputs
- Stylish flush-mount FlipTop housing
- Keypad with dual bargraphs (QM-FTMCSC)
- Dual-channel gated mic/line preamp
- AC power outlet and LAN cable pass-thru
- Easy pull-out VGA cable management
- Black anodized or brushed aluminum finishes

C2N-FTB-D
FlipTop Control Center

- Stylish flush-mount FlipTop housing
- Integrated keypad with dual bargraphs
- Easy pull-out universal cable management
- 2 AC power outlets
- Cresnet® communications
- Black anodized or brushed aluminum finishes

FT-PWR-D
FlipTop Power Center

- Stylish flush-mount FlipTop housing
- Easy pull-out universal cable management
- 2 AC power outlets
- Black anodized or brushed aluminum finishes

QM-MDM3X1
3x1 QuickMedia® Mini-Switcher

- Compact 3x1 QuickMedia® switcher
- Provides easy input expansion for any QM Receiver
- Mounts directly to pole-mounted QM-RMCRX-BA
- Low profile design
- Built-in Cresnet® power distribution
- Audio breakaway capability

QM-MD4X2
QM-MD4X4
QM-MD8X8
QM-MD16X16
QuickMedia® Matrix Switchers

- 4 matrix sizes available
- Simple, versatile QuickMedia® signal routing
- Easy single cable connections
- Audio breakaway capability
- Front panel controls
- Single-space rack-mountable
- Built-in Cresnet® hub (QM-MD16X16)

QM-MD5X1
5x1 QuickMedia® Distribution Center

- Versatile matrix switcher and audio processor
- 2 composite, S-video, or component inputs
- 2 RGB inputs | 1 RGB monitor pass-thru
- 4 stereo audio inputs
- 1 QuickMedia® input
- 1 QuickMedia® output
- Discrete stereo program and speech channels
- 10-band graphic + 2-band parametric EQ
- Versatile input mixing and microphone EQ
- 40 ms speech delay
- Front panel controls
- Single space rack-mountable

QuickMedia®

QM-MD7X2
7x2 QuickMedia® Distribution Center

- Versatile matrix switcher and audio processor
- 3 composite, S-video, or component inputs
- 2 RGB inputs | 1 RGB monitor pass-thru
- 5 stereo audio inputs
- 2 gated microphone inputs
- 2 QuickMedia® inputs
- 2 QuickMedia® outputs
- 2 audio outputs w/discrete stereo program and speech channels
- 10-band graphic + 2-band parametric EQ
- Versatile input mixing and microphone EQ
- 40ms speech delay
- Front panel controls
- Single space rack-mountable

QM-AE
QuickMedia® Audio Extractor

- Inserts in the QuickMedia® signal path
- Discrete stereo program and speech outputs
- 10-band graphic + 2-band parametric EQ
- Versatile input mixing and microphone EQ
- 40 ms speech delay
- 1/2-space rack-mountable

QM-DA-4
QM-DA-8
QM-DA-16
QuickMedia® Distribution Amplifiers

- Distribute a single QM signal up to 16 receivers or touchpanels
- Easy single cable connections
- Built-in Cresnet® hub (QM-DA-16)
- No control or adjustments necessary
- Single space rack-mountable

QM-AMP3X80MM
3 Channel Multimedia Amplifier

- Professional power amplifier
- 3 channels of Class G amplification:
  - 1X 80 Watt @ 70 volts
  - 2X 80 Watts @ 8 Ohms; 110 Watts @ 4 Ohms
- Power control and temperature monitoring via Cresnet®
  - Single space rack-mountable

QM-AMP3X80SR
3 Channel Sound Reinforcement Amplifier

- Professional power amplifier
- 3 channels of Class G amplification:
  - 3X 80 Watt @ 70 Volts
- Power control and temperature monitoring via Cresnet®
- Single space rack-mountable

iMedia

IM-RXV1-M
IM-RXV3-M
iMedia Receivers w/Microphone Input & Video Output

- Low cost single display multimedia presentation control
- Fast and simple one-wire installation
- Handles XGA resolution up to 84 feet
- UXGA maximum up to 34 feet
- Supports composite video signals
- Built-in LAN, RS-232, IR, relays and digital in control ports
- Balanced line input for microphone signals
- Built-in 20W stereo amp and line outputs
- iMedia Wizard Software affords complete setup in minutes
- e-Control® and RoomView™ support
- Supports up to 3 IM transmitters (IM-RXV3-M)

IM-TCCV-M
iMedia Table Mount Computer & Video Center

- Flush-mount, under-table, or mobile multimedia interface
- Streamlined user controls
- Fast and simple one-wire installation
- Computer RGB, composite video, and audio inputs

IM-WCCV-M

iMedia Wall Plate Computer & Video Center

- Low cost wall mount multimedia interface
- Streamlined user controls
- Fast and simple one-wire installation
- Computer RGB, composite video, and audio inputs

IM-WCCV-S-M

iMedia Wall Plate Computer & Video Center w/Separate Control Panel

- Low cost wall mount multimedia interface
- Separate interface and control panels
- Streamlined user controls
- Fast and simple one-wire installation
- Computer RGB, composite video, and audio inputs

IM-FTCC-B

iMedia FlipTop Computer Center

- Flush-mount tabletop multimedia interface
- Streamlined user controls
- Fast and simple one-wire installation
- Computer RGB and audio inputs
- Easy pull-out cables and AC power outlet

IM-FTCCV-M

iMedia FlipTop Computer & Video Center

- Flush-mount tabletop multimedia interface
- Streamlined user controls
- Fast and simple one-wire installation
- Computer RGB, composite video, and audio inputs
- Easy pull-out cables and AC power outlet

Digital Video Processor

DVPHD

High-Definition Digital Video Processor

- The only multi-window video presentation processor available that supports HD video with HDCP!
- Handles DVI, HDMI™, and DisplayPort multimode digital video sources
- **NEW!** Multiple outputs allow separate audience and presenter displays
- **NEW!** Presenter output includes touchscreen guide bar with annotation tools and custom control objects
- **NEW!** Audience output displays pure high-definition video without guidebar
- Easy setup and operation via LCD front panel and Web interface
- Fully integrates with a Crestron control system
- Isys™ touchpanel interface
- Up to 8 fully-scalable video windows
- High-definition scaling and deinterlacing
- Resolutions up to 1920x1200 pixels
- HDTV support up to 1080p60
- Fully-customizable 24-Bit Isys™ graphics
- Synapse™ Image Rendering Algorithm
- DNav dynamic menu objects
- Horizontal crawling text object
- Pop-up windows
- Enhanced transition effects
- Remote interactive annotation capability
- Built-in test patterns
- Wide selection of digital and analog inputs
- Advanced HDCP compliance
- Wired or wireless USB mouse support
- Ethernet and Cresnet® communications
- Three-space rack-mountable
- Built-in international power supply

Surround Sound & Multiroom Distribution

AMS-AIP
Adagio® Media System w/Advanced Image Processing

- Integrated surround sound processor and amplifier
- Audyssey MultEQ XT advanced equalization
- 7 x 100W surround sound amplification
- High-definition analog and HDMI/DVI digital video switching
- Crestron QuickSwitch HD™ technology
- Gennum Visual Excellence Processing™
- TruMotionHD™ fully adaptive deinterlacing
- Optimizes input signals to match the display
- Up to 1600x1200 non-interlaced output
- Full 1080p60 HDTV support
- Advanced HDCP implementation
- Customizable onscreen graphics and menus
- Picture-in-Picture with alpha blending
- Audio distribution for 4 to 6 rooms
- Expandable up to 24 rooms using AAE
- Integrated 45W x 8 channel power amplifier
- Choice of room controllers and remotes
- Modular multi-channel AM/FM and SIRIUS XM Radio tuners
- Setup via front panel or software
- Built-in 2-Series Ethernet control system

AMS
Adagio® Media System

- Integrated surround sound processor and amplifier
- Audyssey MultEQ XT advanced equalization
- 7 x 100W surround sound amplification
- High-definition analog and HDMI digital video switching
- Audio distribution for 4 to 6 rooms
- Expandable up to 24 rooms using AAE
- Integrated 45W X 8 channel power amplifier
- Choice of room controllers and remotes
- Modular multi-channel AM/FM and SIRIUS XM Radio tuners
- Setup via front panel or software
- Built-in 2-Series Ethernet control system

AES
Adagio® Entertainment System

- Audio distribution for 6 rooms
- Expandable up to 24 rooms using AAE
- Integrated 45W x 12 channel power amplifier
- Enhanced front panel setup and control
- Choice of room controllers and remotes
- Modular multi-channel AM/FM and SIRIUS XM Radio tuners
- Built-in 2-Series Ethernet control system

AADS
AADS-XM
Adagio® Audio Distribution System

- Audio distribution for 6 rooms
- Expandable up to 24 rooms using AAE
- Integrated 45W x 12 channel power amplifier
- Front panel setup and control
- Choice of room controllers and remotes
- Built-in AM/FM and optional SIRIUS XM Radio tuners
- Built-in 2-Series Ethernet control system

AAE
Adagio® Audio Expander

- 6 room audio distribution
- 10 stereo line inputs
- 45 Watts X 12 channel power amplifier
- Expands Adagio systems
- Works with any Crestron 2-Series control system
- Built-in Cresnet® distribution

CEN-TRACK
Tuner Rack

- Modular multi-tuner using Adagio tuner cards
- Up to 6 AM/FM tuners, or up to 3 satellite radio and 3 AM/FM tuners
- Supports SIRIUS XM Radio
- Touchpanel display of program guides and metadata
- Up to 20 channel presets per tuner
- Balanced, unbalanced, and digital audio outputs
- Ethernet integration with 2-Series control systems
- Easy setup from front panel or software
- 2-space rack-mountable

CNX-PAD8A
Audio Distribution Processor

- High-performance stereo audio switcher and preamp
- Distributes 8 stereo audio sources to 8 line outputs
- Combinable for up to 32 rooms
- Volume, bass, treble, balance, loudness, and mute controls
- Programmable input gain compensation
- Selectable mono summing on each output
- Protective output mute relays
- Fully configurable in SystemBuilder™ software
- Cresnet® communications

CNX-BIPAD8
CAT5 Audio Distribution Processor

- High-performance stereo audio switcher and preamp
- Distributes 16 stereo audio sources to 8 line outputs
- RCA and RJ45 CAT5 outputs
- Combinable for up to 32 rooms
- Volume, bass, treble, balance, loudness, and mute controls
- Protective output mute relays
- 8 additional room return inputs via CAT5
- Programmable input gain compensation
- Selectable mono summing on each output
- Fully configurable in SystemBuilder™ software
- Cresnet® communications

CNAMPX-12X60
CNAMPX-16X60
Multi-Room Amplifiers

- Audiophile-grade 12 and 16 channel amplifiers
- Speaker-level distribution to 6 or 8 rooms
- 60 Watts/ch.@ 8 Ohms; 90 Watts/ch.@ 4 Ohms
- Separate power supply for every channel
- Convection-cooled modular component design
- Up to 8 outputs bridgeable using optional CNXBRMO
- Power control and temperature monitoring via Cresnet®
- Independent on/off control per stereo pair, channel fault detection, output level monitoring and short-circuit detection (CNAMPX-16X60)

CNAMPX-2X60
2 Channel Room Amplifier

- Audiophile-grade 2 channel amplifier
- High-performance Class AB design
- Discrete high-current, bipolar output transistors
- 60 Watts/ch. @ 8 Ohms; 90 Watts/ch. @ 4 Ohms
- 200 Watts bridged-mono @ 8 Ohms
- Twin MOH-core toroidal transformers
- Fanless convection-cooled design
- Opto-coupled output protection
- Power control and temperature monitoring via Cresnet®

C2N-DAP8
7.1 Surround Sound Processor

- Cost-effective, high-end performance
- Extensively customizable touchpanel control
- No front panel controls – reduces cost and prevents trouble
- Analog Devices SHARC 32-bit floating point DSP
- Dolby Digital EX and Dolby Prologic II surround modes
- DTS ES and DTS Neo:6 2-channel modes
- Precision 24-bit 96 kHz A/D converters
- 6-band parametric equalization and 20 ms delay adjustment per output
- Discrete subwoofer output with LFE and extensive bass management control
- 7.1 output featuring 24-bit 192 kHz D/A converters
- Two stereo outputs for separate zone feed and recording
- Bidirectional CAT5 balanced audio port for connection to CNX-BIPAD8
- 2 coaxial and 2 optical digital audio inputs
- 5 RCA-type analog stereo inputs
- Complete setup using Digital Media Tools software
- Cresnet® communications

C2N-DAP8RC
7.1 Surround Sound Processor and Room Solution Box

- Professional surround sound processor and video switcher
- All the features of the C2N-DAP8 combined with a CNXRMCLV room solution box
- High-bandwidth crosspoint video matrix
- 12 RCA inputs and 12 RCA outputs – configurable for composite, S-video, HDTV/component, and digital audio
- Bidirectional CAT5 balanced audio & video – connects to head-end via CresCAT-Q wire
- Built-in video signal sensing
- 1 RS-232 and 4 IR control ports
- Optional current sensor
- Optional IR remote receiver

Surround Sound & Multiroom Distribution

CNAMPX-7X200
7 Channel Surround Sound Amplifier

- 7 channels of world-class audio amplification
- 200 Watts/ch.@ 8 Ohms; 300 Watts/ch.@ 4 Ohms
- Massive twin toroidal transformers with MOH cores and bifilar windings
- Separate power supply for each mono channel
- Convection-cooled modular component design
- Power control and temperature monitoring via Cresnet®

C2N-VEQ4
4 Channel Volume/ Equalizer Module

- Professional quality volume control, equalization, and signal routing
- 24-bit 96KHz A/D and D/A converters
- 4 balanced/unbalanced line-level I/O channels
- Dynamically adjustable 4 x 4 matrix mixer
- Independent volume, bass, treble, and mute per channel
- 12-band parametric or graphic equalization per channel
- Output relays for silent muting and “thump” prevention
- Configuration presets and real-time control with true-feedback
- Complete setup using Digital Media Tools software
- Cresnet® communications
- 1/2-space rack-mountable
- Y-bus control card version available

CNX-PVID8X3
CNX-PVID8X4
CAT5 Video Distribution Switchers

- CAT5 balanced video distribution to 8 rooms
- Combinable to support up to 32 rooms
- Variable input configurations:
  - 16 inputs - any type: YPbPr, S-video, or composite
  - 24 inputs - 8 composite, 8 S-video/composite, & 8 YPbPr/S-video/composite
  - 32 inputs - 16 composite & 16 S-video/composite
- 16 coaxial digital audio inputs (CNX-PVID8X4 only)
- Supports 1080i HDTV up to 500 feet over CAT5e
- Built-in video signal sensing on every input
- RCA outputs for conventional matrix switching
- Fully configurable in SystemBuilder™ software
- Controllable via Cresnet® communications

CNXRMC
CNXRMCLV
CAT5 Room Solution Boxes

- CAT5 AV receiver and control interfaces
- Composite, S-video, and HDTV/component
- Local AV source routing and control
- Integrated stereo preamp
- Built-in video signal sensing
- Single-cable hookup using CresCAT® wire
- Supports 1080i HDTV up to 500 feet
- Adjustable video compensation
- Controllable via Cresnet® communications

Apple® Integration Solutions

NEW!

CEN-ISERVER
Crestron iServer™ Network Audio Server

- “Made for iPod” network audio server
- Harnesses the Apple® iPod® as its engine
- Full 2-way touchpanel control
- Displays metadata and album cover art
- Syncs to iTunes® over Ethernet
- Buffered audio and video outputs
- CAT5 Balanced AV connectivity
- Plug-and-play integration with Adagio®
- Single space 19" rack-mountable

NEW!

CEN-IDOCV
Interface for Apple iPod® w/Video

- “Made for iPod” AV and control interface
- Connects to iPod via cable or docking station
- Full 2-way touchpanel control of the iPod
- Displays metadata and album cover art
- Plays audio throughout the home or office
- View video files on a video touchpanel or display
- Syncs to iTunes® over Ethernet
- Charges the iPod battery
- PoE network powered
- Includes CAT5 Balanced AV connectivity
- Plug-and-play integration with Adagio®
- Docking station available in white or black

Apple® Integration Solutions

NEW!

CEN-IDOCV-DSW

Wall Mount Interface for Apple® iPod®

- "Made for iPod" AV and control interface
- iPod®, iPod touch®, and iPhone® compatible
- Convenient in-wall docking station
- Full 2-way touchpanel control of the iPod
- Displays metadata and album cover art
- Includes front panel volume control
- Plays audio throughout the room or office
- View video files on a video touchpanel or display
- Syncs to iTunes® over Ethernet
- Charges the iPod battery
- PoE network powered
- Includes CAT5 Balanced AV connectivity
- Plug-and-play integration with Adagio®

NEW!

Crestron Mobile Pro™

App for iPhone®

- Application download from iPhone® App Store
- Control your AV system as well as shades, lights and climate
- Communicates with 2-Series control system via Wi-Fi and 3G/EDGE cellular networks
- Control multiple locations from one iPhone
- Full integration with Crestron programming software
- No external servers or third-party software needed
- Compatible with the original iPhone, iPhone 3G, 3GS and iPod touch®
- Large library of built-in graphics to aid in custom designs and to reduce download times on slower cell networks
- View device metadata

Crestron Mobile™

Apple® iPhone®/iPod touch® control interface

- Application download from iPhone® App Store
- Control lighting, shades and climate
- Communicates with 2-Series control system via Wi-Fi and 3G/EDGE cellular networks
- Control multiple locations from one iPhone
- Full integration with Crestron programming software
- No external servers or third-party software needed
- Compatible with the original iPhone, iPhone 3G, 3GS and iPod touch®
- Large library of built-in graphics to aid in custom designs and to reduce download times on slower cell networks

e-Control SDK for Adobe® Flash® Component

- New Software Development Kits (SDK) from Crestron give programmers and developers the tools they need to link their applications with Crestron
- Solutions for Adobe® Flash®, and Microsoft® ActiveX® and .NET, allow for all kinds of uses – from creating cool, animated user-interfaces to integrating with building management and scheduling software
- Whether on a Windows PC, Linux, or a Mac, e-Control SDKs open the door to all computer users to access the world of Crestron control

Roomview™

RoomView™ Server Edition

Enterprise Control and Scheduling Software

- **NEW!** Scheduling from Lotus Notes or Internal Scheduler
- **NEW!** Room auto-discovery and asset import from user interface
- **NEW!** Improved installation and configuration
- **NEW!** Meeting preset scheduling – define by type of meeting or presentation
- **NEW!** Added language support for Chinese, Norwegian, Russian and Korean
- **NEW!** Improved graphical interface – cleaner icons, color schemes and navigation
- **NEW!** Schedule rooms by assets or geographic location
- **NEW!** Improved event logging and status indication alerts
- **NEW!** Define staff asset roles for automatic email notifications
- **NEW!** Improved search criteria for attribute status, schedules or custom fields

Control Systems

PRO2
AV2

Professional Dual Bus Control Systems

- 2-Series engine | Dual-bus architecture
- 4GB Compact Flash memory card slot
- Cresnet® port – master/slave selectable
- 10/100 Ethernet capable | SSL encryption
- e-Control® and RoomView™ enabled
- SNMP support | Built-in firewall, NAT and router
- 6 COM, 8 IR/serial, 8 Versiport I/O & 8 relay ports
- 3 Y-Bus / 1 Z-Bus control card expansion slots
- Internal power supply | 2-space rack-mountable
- Front control panel with LCD display (PRO2 only)

RACK2

Dual Bus Control System w/Solutions Card Frame

- 2-Series engine | Dual-bus architecture
- 4GB Compact Flash memory card slot
- Cresnet® port – master/slave selectable
- Integrated Cresnet® network hub
- 10/100 Ethernet capable | SSL encryption
- e-Control® enabled | SNMP support
- Built-in firewall, NAT and router
- 12 Y-Bus control card expansion slots
- 4 Z-Bus control card expansion slots
- 4-space rack-mountable
- Front control panel with LCD display

CP2E

Compact Control System

- 2-Series engineDual-bus architecture
- Cresnet® port - master/slave selectable
- 10/100 Ethernet | SSL encryption
- e-Control® enabled | SNMP support
- 3 COM, 8 IR/serial, 8 Versiport I/O, & 8 relay ports
- Single space rack-mountable

MC2E

Compact Control System

- 2-Series engine | Dual-bus architecture
- Cresnet® port - master/slave selectable
- 10/100 Ethernet | SSL encryption
- e-Control® enabled | SNMP support
- 2 COM, 4 IR/serial, 4 Versiport I/O & 4 relay ports
- IR wireless compatible using CNXRMIRD
- Single space rack-mountable

MP2
MP2E

Integrated AV Control Systems

- 2-Series engine | Dual-bus architecture
- 4x2 video and 7x1 stereo audio switchers
- Video input signal sensing
- Stereo 6-band parametric or graphic EQ
- Cresnet® port - master/slave selectable
- 10/100 Ethernet | SSL encryption (MP2E only)
- e-Control® enabled | SNMP support (MP2E only)
- 2 COM, 4 IR/serial, 4 Versiport I/O & 4 relay ports
- IR wireless compatible using CNXRMIRD
- Single space rack-mountable

PAC2

Professional Automation Control System

- 2-Series engine | Dual-bus architecture
- 4GB Compact Flash memory card slot
- Built-in Cresnet® distribution and hub/repeater
- 10/100 Ethernet capable | SSL encryption
- e-Control® and RoomView™ enabled
- SNMP support | Built-in firewall, NAT and router
- 8 Versiport I/O ports & 8 relay ports built-in
- 2 Y-Bus/1 Z-Bus control card expansion slots
- Internal power supply | CAEN enclosure installation
- Configurable via Crestron D3 Pro® software

PAC2M

Professional Automation Mini Control System

- 2-Series control engine
- MMC memory expansion card slot
- Built-in Cresnet® distribution and hub/repeater
- 10/100 Ethernet capable | SSL encryption
- e-Control®, SNMP, & RoomView™ support
- 4 relay and 4 digital input control ports
- Occupies a single module space in any CAEN enclosure
- Surface-mountable without an enclosure
- Configurable via Crestron D3 Pro® software
- Requires external power supply

Power Conditioner

CEN-UPS1250
Uninterruptible Power Supply

- UPS and power conditioning – Engineered by APC®
- 2-Series control system integration
- Centralized management via RoomView™ software
- Battery backup and power control management
- Surge protection for power line, coax and telco
- Isolated EMI and RFI noise filtering
- Automatic voltage regulation
- Built-in environmental monitoring
- Onboard data and event logging
- 19" 4-post EIA rack-mountable

Keypads

APAD
Wall Mount LCD Controller

- Stylish wall mount controller
- LCD graphic display
- Scrolling list object
- 4 “softkeys”, enter, and power buttons
- Nav wheel with “key click” sound
- Adagio® and MPS plug-and-play functionality
- Cresnet® communications
- Gloss white or black finishes

C2N-CBF-T
Cameo® Flush Mount Keypads

- Stylish and versatile wall mount keypads
- Low profile flush mount appearance
- New refined pushbutton look and feel
- Versatile combinations of 2 to 6 pushbuttons
- Installer-configurable with choice of 3 button sizes
- Programmable for up to 3 functions per button
- Customizable backlit button engraving
- White LED lightpipe feedback indicators
- Built-in LED blinking and bargraph logic
- Auto-dimmable backlight and LED intensity
- 2 contact closure inputs
- Ambient light sensor
- Available in textured almond, black or white
- Quick and easy installation
- Cresnet® communications

C2N-CBD-TS
INET-CBD
Cameo® Keypads Standard Mount

- Stylish and versatile wall mount keypads
- Standard electrical box installation
- Color-matched "smooth" and "textured" finishes
- Versatile combinations of 2 to 6 pushbuttons
- Installer-configurable using 3 button sizes
- Programmable for up to 3 functions per button
- Customizable backlit button engraving
- White LED lightpipe feedback indicators
- Built-in LED blinking and bargraph logic
- Auto-dim backlight and LED intensity
- 2 contact closure inputs (C2N-CBD-TS only)
- Ambient light sensor
- Available in twelve designer colors/finishes
- Cresnet® or infiNET™ communications

C2NI-CB
INETI-CB
Cameo® Keypads International Versions

- Stylish and versatile wall mount keypads
- UK/European style electrical box installation
- Versatile combinations of 4 to 12 pushbuttons
- Installer-configurable using 3 button sizes
- Programmable for up to 3 functions per button
- Customizable backlit button engraving
- White LED lightpipe feedback indicators
- Built-in LED blinking and bargraph logic
- Auto-dim backlight and LED intensity
- 2 contact closure inputs (C2NI-CB only)
- Ambient light sensor
- Available in textured almond, black or white
- Architectural Series faceplate options
- Cresnet or infiNET™ communications

C2N-DB
Decorator Series Keypads

- Fits standard electrical boxes and standard decorative faceplates
- Available with 6, 8, and 12 engravable buttons
- Programmable feedback LEDs
- Available in black, white, and almond
- Cresnet® communications

CNX-B
Designer Series Keypads

- Stylish appearance with large-sized buttons
- Elegant designer and architectural faceplates
- Choice of 2, 4, 6, 8, or 12 engravable buttons
- Gang up to 3 keypads side-by-side
- Programmable feedback LEDs
- Backlit engraving option
- WAV file audible feedback
- Built-in temperature sensor
- Available in black, white, and almond
- Cresnet® communications

Keypads

HTT-B10X
infiNET™ TableTop Controller

- Stylish wireless pushbutton controller
- 10 engravable backlit buttons
- Configurable for up to 3 functions per button
- White LED lightpipe feedback indicators
- True-feedback and dual-bargraph capability
- infiNET™ 2-way RF wireless communications
- Powered by batteries or external power pack
- Wakes instantly when touched or picked up
- Auto-dim backlight and LED intensity
- Available in black or white

infiNET EX™ Lighting

NEW!

CLW-DIMEX-E
Decorative Wall Mount Dimmer

- Screw terminal connection
- Supports up to 600W loads
- Installs in a 1-gang back box
- Based on industry standard ZigBee® PRO
- Available in 3 designer colors
- UL listed

NEW!

CLW-SWEX-E
Decorative Wall Mount Switch

- Screw terminal connection
- Supports up to 600W loads
- Installs in a 1-gang back box
- Based on industry standard ZigBee® PRO
- Configurable buttons
- Available in 3 designer colors
- UL listed

NEW!

CLW-DIMSWEX-E
Decorative Wall Mount Dimmer/Switch

- Screw terminal connection
- Supports up to 600W loads on dimmer
- Installs in a 1-gang back box
- Based on industry standard ZigBee® PRO
- Configurable buttons
- Available in 3 designer colors
- UL listed

NEW!

CLW-DIMEX-P
Decorative Wall Mount Dimmer

- Screw terminal connection (flying lead earth)
- Supports up to 1000W loads
- Multi-way control via slave units
- Installs in a 1-gang back box
- Based on industry standard ZigBee® PRO
- Configurable buttons
- Available in 12 designer colors / finishes
- UL listed

NEW!

CLW-SWEX-P
Decorative Wall Mount Switch

- Screw terminal connection (flying lead earth)
- Supports up to 600W loads
- Multi-way control via slave units
- Installs in a 1-gang back box
- Based on industry standard ZigBee® PRO
- Configurable buttons
- Available in 12 designer colors / finishes
- UL listed

NEW!

CLW-DIMSWEX-P
Decorative Wall Mount Dimmer/Switch

- Screw terminal connection
- Supports up to 600W loads on dimmer
- Installs in a 1-gang back box
- Based on industry standard ZigBee® PRO
- Available in 12 designer colors / finishes
- UL listed

NEW!

CLW-SLV-P
Slave Unit to PRO Line Dimmers and Switches

- Connect up to 10 per switch or dimmer
- Provides multi-way control of lighting
- Installs in a 1-gang back box
- Based on industry standard ZigBee® PRO
- Configurable buttons
- Available in 12 designer colors / finishes
- UL listed

NEW!

CLW-DIM-CN-P
Decorative Wall Mount Cresnet® Dimmer

- Screw terminal connection (flying lead earth)
- Supports up to 1000W loads
- Multi-way control via slave units
- Installs in a 1-gang back box
- Configurable buttons
- Available in 12 designer colors / finishes
- UL listed

NEW!

CLW-SW-CN-P
Decorative Wall Mount Cresnet® Switch

- Screw terminal connection (flying lead earth)
- Supports up to 600W loads
- Multi-way control via slave units
- Installs in a 1-gang back box
- Available in 12 designer colors / finishes
- Configurable buttons
- UL listed

NEW!

CLW-DIMSW-CN-P
Decorative Wall Mount Cresnet® Dimmer/Switch

- Screw terminal connection
- Supports up to 600W loads on dimmer
- Installs in a 1-gang back box
- Configurable buttons
- Available in 12 designer colors / finishes
- UL listed

Wall Box and Lamp Dimmers

CLW-Series
Wall Box Dimmers and Switches

- 1000 Watt/VA dimmers and switches
- Standard electrical gang box installation
- 2-wire Cresnet network communications for full automation
- Will still function if network is disrupted
- Single-point and multipoint versions
- Simple one-button or deluxe multi-button designs
- Built-in user presets
- Available in white, black, and almond

CLW-RF Series
infiNET™ Wireless Dimmers and Switches

- 2-way wireless mesh network communications – no control wiring required!
- Directly replace standard in-wall dimmers and light switches
- Will still function if network is disrupted
- 1000 Watt/VA dimmers and switch models
- Single-point and multipoint versions
- Rocker switch or 4-button keypad
- Available with custom engraving
- Built-in user presets
- Available in white, black, and almond

CLF-DIMRFB
infiNET™ Lamp Dimmer

- Dimming control for floor or table lamp
- Crestron system integration via infiNET™ wireless network
- Local dimming control via built-in footswitch

CLW-LDIMEX
Wireless Lamp Dimmer

- Convenient wirless lamp controller
- Crestron system integration via infiNET EX™ wireless network
- Connects directly to any standard U-ground outlet
- Based on industry standard Zigbee® PRO
- 600 Watt Incandescent / Tungsten Halogen or Magnetic Low-Voltage

iLux® Integrated Lighting System

CLS-C6
CLS-C6M
iLux® Integrated Lighting Systems

- Wall-mounted integrated lighting and shade control
- 6 channels of dimming or switching
- 6 groups of shade and drape control
- Linkable for up to 54 lighting channels and 54 shade groups
- Up to 16 user-settable scenes | 7 configurable "rocker" buttons
- Customizable label strip | ON and OFF buttons
- 6 bargraphs show lighting levels and shade positions
- Flip-up front cover reveals setup controls
- Easy setup from front panel or iLux Designer software
- Multipoint control using up to 16 keypads
- Optional IR remote | Master air-gap relay
- Integrates with 2-Series control systems via Cresnet®
- Available in almond, black, or white
- Built-in motion detector (CLS-C6M only)

CLS-C6RF
CLS-C6MRF
iLux® Integrated Lighting System w/infiNET™

- All the features of the CLS-C6 or CLS-C6M
- Communicates with control system via infiNET™ wireless network

CLS-EXP-DIM
iLux® Dimmer Expansion Module

- Works with iLux®, CLW, and CLX Series dimmers
- Supports 120, 230, and 277 Volt incandescent, NCC, MLV, and 2-wire dimmable fluorescent loads
- Minimum fluorescent dimming level adjustment
- Built-in air gap relay at the output
- Surface mount design

CLS-EXP-DIMU
iLux® Universal Dimmer Expansion Module

- Works with iLux®, CLW, and CLX Series dimmers
- Supports 120, 230, and 277 Volt ELV, MLV, NCC, incandescent, and 2-wire dimmable fluorescent loads
- Auto-selects for forward or reverse phase ballasts
- Minimum fluorescent dimming level adjustment
- Built-in air gap relay at the output
- Surface mount design

CLS-EXP-DIMFDB
iLux® 3-Wire Fluorescent Dimmer Expansion Module

- Works with iLux®, CLW, and CLX Series dimmers
- Supports 120, 230, and 277 Volt ELV, MLV, NCC, incandescent, and 2-wire dimmable fluorescent loads
- Auto-selects for forward or reverse phase ballasts
- Minimum fluorescent dimming level adjustment
- Built-in air gap relay at the output
- Surface mount design

CLS-EXP-DIMFLV
iLux® 0-10V Fluorescent Dimmer Expansion Module

- Works with iLux®, CLW, and CLX Series dimmers
- Supports 120, 230, and 277 Volt 4-wire 0-10 Volt fluorescent dimming
- Supports switching of non-dimmable lighting loads and 1/2 HP motors
- Built-in air gap relay at the output
- Surface mount design

C2N-SSC-2
Somfy® Shade Controller

- Provides a bidirectional serial interface to (2) Somfy ILT intelligent shade motors
- Enhanced functionality over conventional 3-wire motors
- Precise, predictable shade positioning
- 20 onboard presets per output
- Discreet surface mount installation
- Cresnet® communications

C2N-SDC
Shade and Drape Controller – 120V AC

- 2-channel 120 volt motor control
- For control of motorized window treatments, lifts and projection screens
- Controls (2) three-wire bidirectional type motors
- Built-in timing and interlock logic
- On-board pushbuttons for manual operation
- Cresnet® communications

C2N-SDC-DC
Shade and Drape Controller – 24V DC

- 2-channel 24 volt motor control
- For control of motorized window treatments, lifts and projection screens
- Built-in timing and interlock logic
- On-board pushbuttons for manual operation
- Cresnet® communications

Power Switching

GLPS
Green Light Power Switching Cabinets

- 120 and 277 volt switching
- 0-10V fluorescent dimming
- 12, 30, or 42 circuits per cabinet
- Integrated branch circuit breakers
- Optional main circuit breaker
- Field-replaceable lighting modules
- Optional access door for local control
- System design by Crestron
- Factory assembled and tested

GLXP-HSW8
GLXP-HSW12
High-Inrush Switch Modules

- 8 or 12 channels of high-inrush power switching
- Rugged, high-current latching relays
- Supports 100 to 277 volt applications
- 16 amp, 1 HP load rating per channel
- Positive air gap at each output
- Each channel phase-independent
- Cresnet® communications
- Redundant power capability
- Local controls for testing and verification
- Local and remote override capability
- Non-volatile power failure memory
- GLEP cabinet installation

GLXP-SW10
GLXP-SW16
Switch Modules

- 10 or 16 channels of power switching
- Mechanically-latching relays
- Supports 100 to 277 volt applications
- 16 amp, 1 HP load rating per channel
- Positive air gap at each output
- Each channel phase-independent
- Cresnet® communications
- Redundant power capability
- Local controls for testing and verification
- Local and remote override capability
- Non-volatile power failure memory
- GLEP cabinet installation

GLXP-DIMFLV8
8 Channel 0-10V Fluorescent Dimmer Module

- 8 channels of 4-wire 0-10 volt fluorescent dimming
- Also allows switching of lighting and motors
- Supports 100 to 277 volt applications
- 16 amp load rating per channel
- Positive air gap at each output
- Each channel phase-independent
- Cresnet® communications
- Redundant power capability
- Local controls for testing and verification
- Local and remote override capability
- Non-volatile power failure memory
- GLEP cabinet installation

IPAC-GL1
Wall Mount Lighting Control Processor

- Crestron 2-Series control engine
- Easy system programming via LCD front panel
- 7 programmable buttons with LED feedback
- Customizable backlit button labels
- CEC Title 24 listed
- Astronomical time clock
- Occupancy sensing and daylight harvesting
- 2 RS-232, 4 digital/analog input, & 4 relay control ports
- Cresnet® and 10/100 Ethernet communications
- Onboard e-Control® Web server
- RoomView™ and SNMP remote management
- SSL (Secure Sockets Layer) network protection
- Extensively programmable via PC software
- 3-gang wall-mountable
- Available in white or black

Architectural Dimming

GLPD Series
Green Light Architectural Dimming Cabinets

- 120 or 277 volt dimming & switching
- 30, 42, or 60 circuits per cabinet
- Available to fit 2, 4, 6, 8, & 12 GLX modules
- Integrated branch circuit breakers
- Optional main circuit breaker
- "Feed-through" cabinets available
- Field-replaceable lighting modules
- System design by Crestron
- Factory assembled and tested
- UL924 listed (emergency power equipment)

GLX-DIM6
6 Channel Dimmer Module

- 6 channels of incandescent, MLV, 2 & 3-wire fluorescent dimming
- Eliminates lamp flicker
- Selectable non-dim mode
- Supports 100 to 277 volt applications
- 16 amp load rating per channel
- Short circuit and overload protection
- Positive air gap at each output
- Cresnet® communications
- Redundant power capability
- Local controls for testing and verification
- Local and remote override capability
- Non-volatile power failure memory
- GLE cabinet installation

GLX-HSW8
8 Channel High-Inrush Switch Module

- 8 channels of high-inrush power switching
- Rugged, high-current latching relays
- Supports 100 to 277 volt applications
- 16 amp, 1 HP load rating per channel
- Positive air gap at each output
- Each channel phase-independent
- Cresnet® communications
- Redundant power capability
- Local controls for testing and verification
- Local and remote override capability
- Non-volatile power failure memory
- GLE cabinet installation

GLX-DIMFLV8
8 Channel 0-10V Fluorescent Dimmer Module

- 8 channels of 4-wire 0-10 volt fluorescent dimming
- Also allows switching of lighting and motors
- Supports 100 to 277 volt applications
- 16 amp load rating per channel
- Positive air gap at each output
- Each channel phase-independent
- Cresnet® communications
- Redundant power capability
- Local controls for testing and verification
- Local and remote override capability
- Non-volatile power failure memory
- GLE cabinet installation

NEW!

Green Light Designer

- Design & document complete commercial lighting solution
- Generate one line drawing, load schedules, equipment lists and more
- Easy to use
- Stand-alone application – no additional software required

DIN-AP2
DIN Rail 2-Series Automation Processor

- 2-Series control engine
- MMC memory expansion card slot
- Cresnet port – master/slave selectable
- 10/100 Ethernet | SSL encryption
- e-Control®, SNMP, & RoomView® support
- 2 bidirectional RS-232 COM ports | 4 IR/serial ports
- 8 Versiport I/O ports | 4 low-voltage relay ports
- Configurable via Crestron D3 Pro® software
- 9M wide DIN rail mounting
- Requires external power supply

DIN-1DIMU4
DIN Rail Universal Dimmer

- 4 channels of forward or reverse phase dimming
- Auto load detection
- 120 to 240 Volt 50/60 Hz operation
- Selectable non-dim mode
- Phase-Synchronous Detection Circuitry
- Short circuit and overload protection
- Cresnet® communications
- Master air-gap relay | Override input
- Setup via front panel or software
- Programmable functionality via DIN-AP2
- 12M wide DIN rail mounting

DIN-4DIMFLV4
DIN Rail 0-10V Fluorescent Dimmer

- 2-Series control engine
- 4 channels of 4-wire 0-10 Volt fluorescent dimming
- Supports 120 to 240 Volt 50/60 Hz
- Also allows switching of lighting and exhaust fans
- Setup via front panel or software
- Override input | Cresnet® communications
- Programmable functionality via DIN-AP2
- 9M wide DIN rail mounting

DIN-8SW8
DIN Rail High-Voltage Switch

- 8 channels of power switching
- Supports 120 to 240 Volt 50/60 Hz
- Override input
- Cresnet® communications
- Setup via front panel or software
- Programmable functionality via DIN-AP2
- 9M wide DIN rail mounting

DIN-2MC2
DIN Rail Motor Control

- Dual-channel bidirectional motor control
- Supports 120 to 240 Volt 50/60 Hz
- Override input
- Cresnet® communications
- Setup via front panel or software
- Programmable functionality via DIN-AP2
- 6M wide DIN rail mounting

DIN-AO8
DIN Rail Analog Output Module

- Eight 0-10V analog output control ports
- Interface for 3rd-party lighting and heating/cooling
- Fully programmable functionality via DIN-AP2
- Setup via front panel or software
- Override input
- Cresnet® communications
- 6M wide DIN rail mounting

DIN-IO8
DIN Rail Versiport Module

- 8 Versiport I/O ports
- Interface for 3rd-party sensors, detectors, contact closures, and alarms
- Fully programmable functionality via DIN-AP2
- Cresnet® communications
- 6M wide DIN rail mounting

DIN-PWS50
DIN Rail 50 Watt Cresnet® Power Supply

- 50 Watt Cresnet® power supply module
- Powers the DIN-AP2 Automation Processor and other Cresnet devices
- Includes 3 Cresnet power ports
- Cresnet® data passes through unaffected
- Dual line power input terminals for easy daisy-chaining
- 6M wide DIN rail mounting

DIN-BLOCK
DIN Rail Cresnet® Distribution Block

- 12 port Cresnet® distribution block
- Detachable screw terminal blocks for easy termination and troubleshooting
- Split power bus for flexible 24V power distribution
- Diagnostic LEDs for network power and data
- Passive device — no programming required
- 6M wide DIN rail mounting

DIN-HUB
DIN Rail Analog Output Module

- 3-segment Cresnet® hub
- For Cresnet networks with more than 20 devices
- Configurable power distribution
- No programming required
- 6M wide DIN rail mounting

CAEN Enclosures and Lighting Modules

CAEN
Automation Enclosures

- Modular enclosures for PAC2, PAC2M, and CLX-Series lighting modules
- UMP universal mounting plates accommodate additional devices
- Available in 5 sizes – over 100 possible circuits in one enclosure!
- Provides a clean and manageable installation
- Surface or flush wall mount installation
- Centralized or distributed configurations
- Also suited for voice and data, security, and RF signal distribution
- UL and UL-C Listed



CLX Dimmer Modules
Dimmer Control Modules

- A complete range of dimmers,
- Up to 8 controlled circuits per module
- Convection cooled for silent and reliable operation
- Easy 5-wire buss link to PAC2 or PAC2M
- Built-in air-gap relays on each output
- Override preset feature
- Separate terminal blocks allow termination of field wiring prior to module installation



CLX High-Inrush Modules
High-Inrush Switching Modules

- High-Inrush switching control
- Up to 4 controlled circuits per module
- Convection cooled for silent and reliable operation
- Easy 5-wire buss link to PAC2 or PAC2M
- Built-in air-gap relays on each output
- Override preset feature
- Separate terminal blocks allow termination of field wiring prior to module installation



CLX Fan and Motor Modules
Lighting Control Modules

- Motor and fan control modules
- Up to 8 controlled circuits per module
- Convection cooled for silent and reliable operation
- Easy 5-wire buss link to PAC2 or PAC2M
- Built-in air-gap relays on each output
- Override preset feature
- Separate terminal blocks allow termination of field wiring prior to module installation

Sensors

GLS-ODT Series
Dual-Technology Occupancy Sensors

- Ceiling and wall mount models
- Up to 2000 square feet coverage
- Discreet, low profile appearance
- Extremely accurate and reliable sensing
- Microprocessor-controlled self-adapting operation
- Fully-digital circuitry for low cost and high reliability
- Built-in ambient light recognition
- Control system interface via Cresnet® or digital input

GLS-OIR Series
Passive Infrared Occupancy Sensors

- Ceiling and wall mount models
- Up to 2500 square feet coverage
- Discreet, low profile appearance
- Accurate and reliable sensing
- Microprocessor-controlled self-adapting operation
- Fully-digital circuitry for low cost and high reliability
- Built-in ambient light recognition
- Control system interface via Cresnet® or digital input

GLS-LOL
GLS-LCL
Photocell Light Sensors

- Designed for open or closed-loop daylight harvesting applications
- Versatile flush or surface mounting
- 0-10V analog control output
- Control system interface via Cresnet® or analog input

Crestron's products and commitment to service have been selected for numerous awards. Below are some recent awards we have won.

2009

CE Pro BEST Awards
- BEST Media Server: ADMS Intermedia Delivery System
- BEST Keypads, Controls, Remotes & IR Extenders: TPMC-3X WiFi Touchpanel
- BEST A/V Preamplifier/Processor/Switcher: DM-MD8x8 DigitalMedia™ Switcher

CEDIA Electronic Lifestyles Awards
- Best New Product: DM-MD8X8 DigitalMedia™ Switcher

Exc!te Awards
- Most Exciting Touchpanel: TPMC-3X

Resi Awards
- Top Industrial Design; Touchscreen Control Panel Category: TPS-6X

System Contractor News
- Most Innovative Control Product for Commercial Installation: TPS-6X
- Most Innovative Video Distribution or Switching Product: DM-MD8X8

Innovative Housing Technology Awards
- Advanced Electrical: CEN-UPS1250
- Lighting and Shade Control: IPAC-GL1
- Best Media Center/Server: Crestron iServer™ Network Audio Server

CEDIA UK Awards
- Best Trade Supplier

CEA Innovations Awards
- Audio Components: Crestron iServer™
- Video Components: ADMS
- HomeTheater: AMS-AIP

CEA Mark of Excellence Awards 2009
- Best Human Interface Product: TPS-6X
- Best Lighting Control Product: CLS-C6MRF
- Best Media Server: Crestron iServer™
- Best Control System: AMS-AIP

EMEA inAVation Awards
- Best Control Product: TPS-6X

rAVe Top Products
- Crestron DigitalMedia™

2008

CEDIA Manufacturers' Excellence Awards
- Best Future Technology: Adagio® Digital Media System (ADMS)
- Best New Product: Crestron iServer™
- Product Hall of Fame: SmarTouch™ STS

CEA Mark of Excellence Awards 2008
- MediaManifold™ High-Definition CATV Distribution System

EHX Multi-Room Awards
- Best Overall Product: AMS-AIP
- All-Inclusive Multi-Room Audio System: AMS-AIP
- Keypads and Controls: Crestron: infiNET™ Cameo
- Lighting Controls and Accessories: iLux® CLS-C6MRF
- Multi-Room Media Servers: Crestron: Crestron iServer
- Multi-Room Touchscreen: TPS-6X

Archi-Tech Readers' Choice Technology Awards
- HVAC: CHV-TSTAT
- Lighting: iLux® CLS-C6M

CE Pro High Impact Product of the Year Awards
- Crestron TPS-6X

EH Publishing 2008 Product of the Year
- Crestron iServer™

Exc!te Awards
- Most Exciting Touchpanel: TPS-6X

Innovative Housing Technology Awards
- Best Media Center: Adagio® Audio Server (AAS)
- Best Window/Door Control: C2N-SDC

2007

System Contractor News
- Most Innovative Video Processing or Distribution Product: MPS Series
- Most Innovative Control Product for Commercial Installation: RoomView®

CE Pro High Impact Innovator of the Year Award
- Crestron Electronics, Inc.

CE Pro High Impact Product of the Year Award
- Crestron Adagio® Media System AMS
- Crestron DVPHD-PRO
- Crestron TPMC-8X

Exc!te Awards
- Best Home Theater System: Adagio® Media System (AMS)

HTSA Annual Awards
- Custom Product of the Year: Crestron TPMC-8X

CEA Mark of Excellence Award
- Best Distribute Audio/Video: Adagio® Entertainment System
- Best IP-based Products: TPMC-8X
- Best Wireless Products: TPMC-8X

EH Publishing 2007 Product of the Year
- Adagio® Media System (AMS)
- Uninterruptible Power Supply (CEN-UPS1250)

NSCA Innovations in Technology Award
- Convergence: TPMC-8X
- Best Control System: MPS-100

CEDIA Electronic Lifestyles Awards 2007
- Lifetime Achievement Award: George Feldstein

2006

System Contractor News
- Most Innovative Control Product for Commercial Installation: TPMC-QM

NSCA Innovations in Technology Award
- Business Productivity: SystemBuilder™ 2.0

CEDIA Manufacturer's Excellence Award
- Adagio® Home Entertainment System (AES)

Crestron World Headquarters
15 Volvo Drive
Rockleigh, NJ 07647
800.237.2041
201.767.3400
Fax: 201.767.1903
crestron.com

Crestron International Headquarters
Oude Keerbergsebaan 2
2820
Rijmenam
Belgium
+32.15.50.99.50
Fax: +32.15.50.99.40
crestron.eu

Crestron Asia Headquarters
Room 2501, 25/F, Westin Centre
No. 26 Hung To Road
Kwun Tong
Hong Kong
+852.2341.2016
Video Ph: +852.2373.7530
Fax: +852.2344.0889
crestronasia.com

Printed in USA Doc. 4735A 10/09

Products manufactured in the United States.

All brand names, product names and trademarks are the property of their respective owners.

©2009 Crestron Electronics, Inc.